



□125x126x39 mm
(□4.92x4.96x1.53 in)



Frame: Aluminum die cast

Impeller : Glass fiber reinforced plastic

Ambient Temperature Range: -20°C ~ +75°C

Operating Voltage Range: Rated Voltage ±10%


Bearing: Ball bearing

Motor Structure: Shaded pole induction, single-phase


Termination: Lead wire

Package: 525g / PC

Dimension (units:mm)

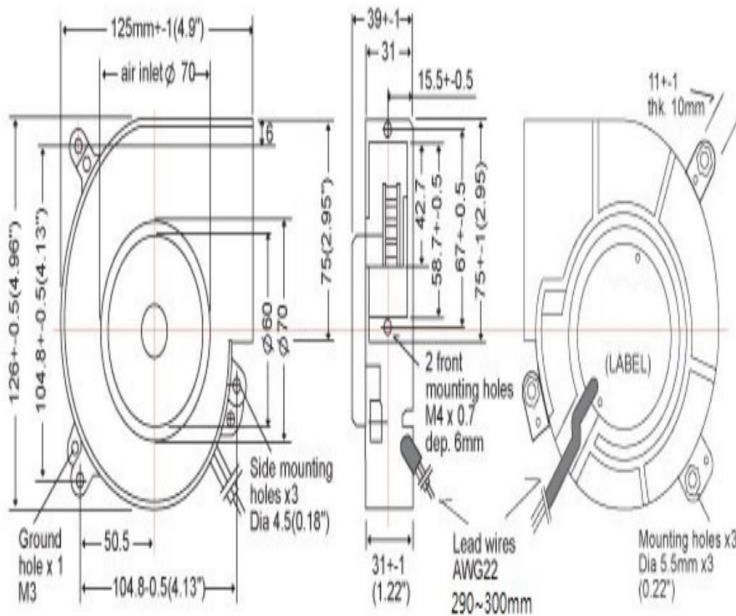

Characteristic Curves

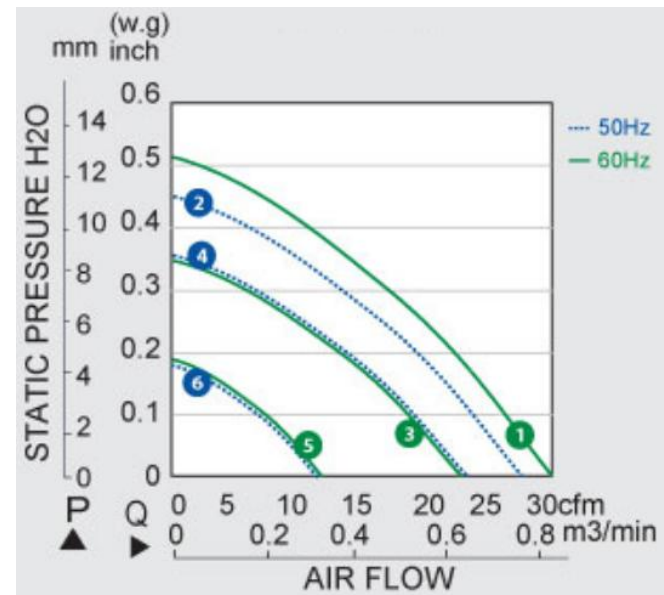

SPECIFICATION

Model	Voltage (V)	Freq. (Hz)	Power (W)	Speed (RPM)	AirFlow (CFM)	Pressure (mm Aq)	Noise (dB)
CYB11239HB	115	50/60	20/18	2500/2700	28/30	10.92/12.95	48
CYB21239HB	230	50/60	20/18	2500/2700	28/30	10.92/12.95	48