



□220x220x56 mm
(□8.66x8.66x2.2 in)



Frame: Aluminum die cast

Impeller : Plastic

Ambient Temperature Range: -20°C ~ +70°C

Operating Voltage Range: Rated Voltage ±10%


Bearing: Ball bearing

Motor Structure: Shaded pole or Capacitor induction


Termination: Lead wire

Package: 1730g / PC

Dimension (units:mm)

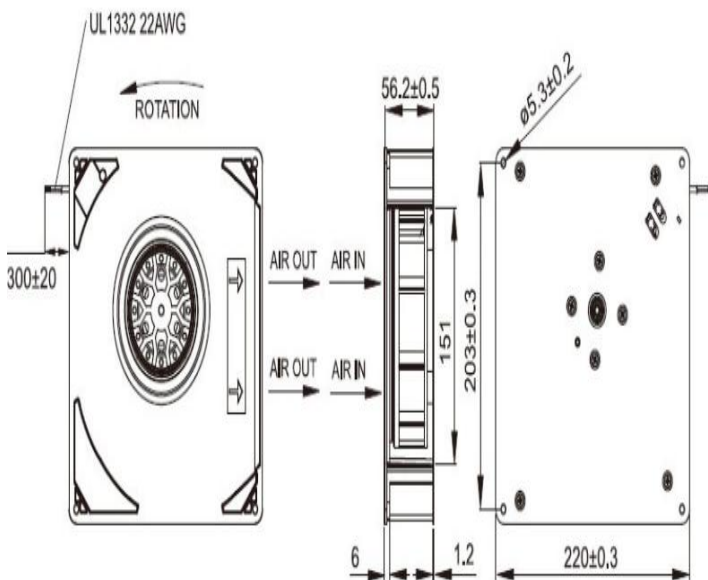

Characteristic Curves

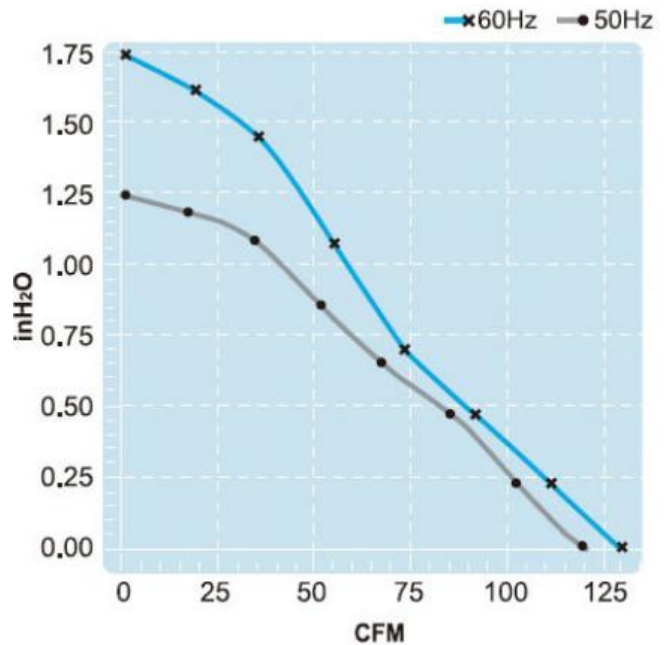

SPECIFICATION

Model	Voltage (V)	Freq. (Hz)	Power (W)	Speed (RPM)	AirFlow (CFM)	Pressure (mm Aq)	Noise (dB)
CYB12256HB	115	50/60	50/52	2700/2900	118/126	33/46	63/65
CYB23389HB	230	50/60	50/53	2700/2900	118/126	33/46	63/65