



# □ 120x120x32 mm



**Impeller / Housing:** Plastic Material UL 94V-0

**Ambient Temperature Range:** -10°C ~ +70°C


**Operating Voltage Range:** Rated Voltage ±10%

**Bearing:** Ball


**Motor Structure:** DC brushless

**Package:** 200 g / PC

## Dimension (units:mm)

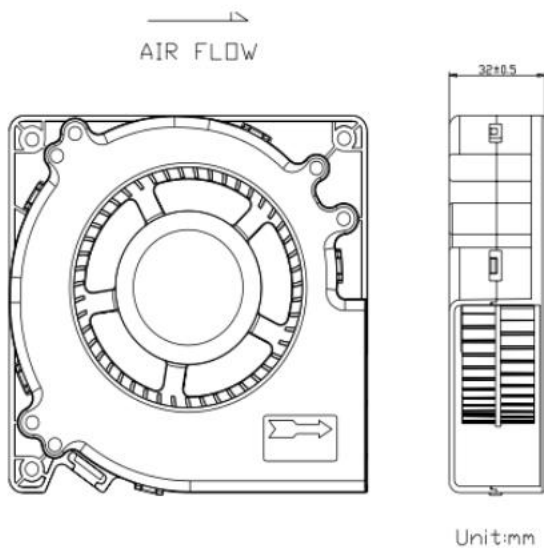

## Characteristic Curves

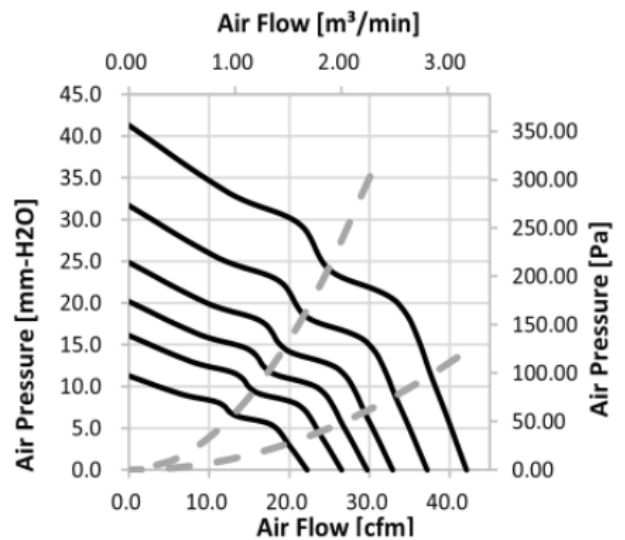

## SPECIFICATION

Model	Voltage (V)	Current (A)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H2O)	Noise (dB)
CDB121232HB	12	0.65	2800	29.70	0.80	55
CDB121232XB	12	0.90	3100	32.90	0.98	57
CDB121232UB	12	1.20	3500	37.20	1.25	59
CDB121232WB	12	1.70	4000	42.10	1.63	63
CDB241232XB	24	0.45	3100	32.93	0.98	57
CDB241232UB	24	0.55	3500	37.20	1.25	59
CDB241232WB	24	0.80	4000	42.10	1.63	63
CDB481232XB	48	0.25	3100	32.90	0.98	57
CDB481232UB	48	0.30	3500	37.20	1.25	59
CDB481232WB	48	0.42	4000	42.10	1.63	63