




□ 20x20x06 mm

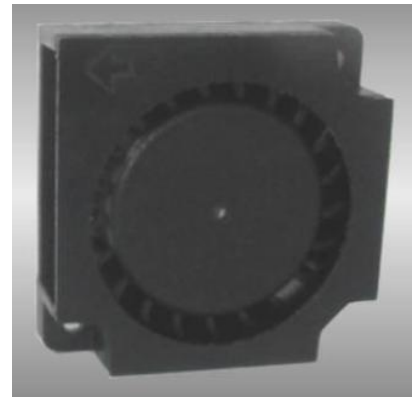

Motor: DC single phase brushless motor

Material/Frame: PBT (94V-0); Impeller: PBT(94V-0)

Operation Temperature:

Two ball bearing -10°C ~ +70°C


FMB/Sleeve bearing -10°C ~ +50°C

Storage Temperature: -40°C ~ +80°C


Non-condensing environment

Weight: 4g / PC

Drawing:

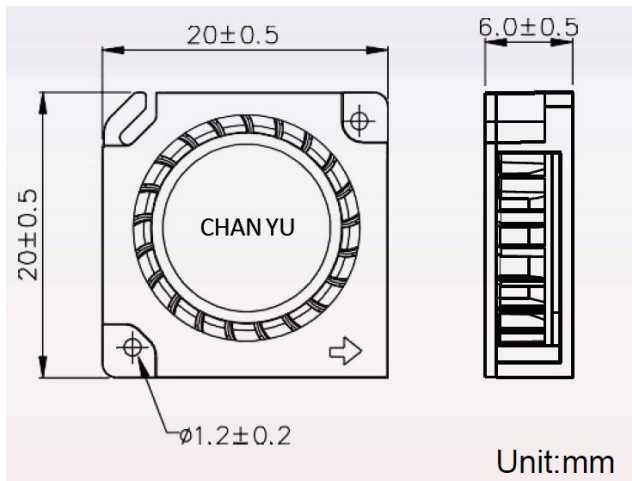

Characteristic Curves

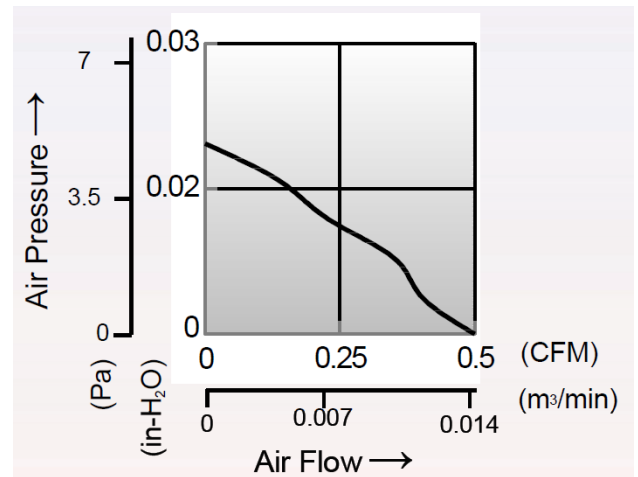

SPECIFICATION

Model	Voltage (V)	Operating Voltage Range(VDC)	Current (A)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H ₂ O)	Noise (dB)
CDB052006HB	5	4.5 – 5.5	0.02	5000	0.5	0.02	10