



□330x330x89 mm



**Frame:** Die cast aluminum

**Impeller:** Glass fiber reinforced PBT thermoplastic, UL94V-0 impeller

**Ambient Temperature Range:** -20°C ~ +65°C

**Operating Voltage Range:** Rated Voltage ±10%

**Bearing:** Ball


**Motor Structure:** Microprocessor brushless DC, auto cutoff/restart, locking

**Motor protection:** polarity protected

**Termination:** Terminal or Lead wire

**Package:** 5650g / PC

### Dimension (units:mm)

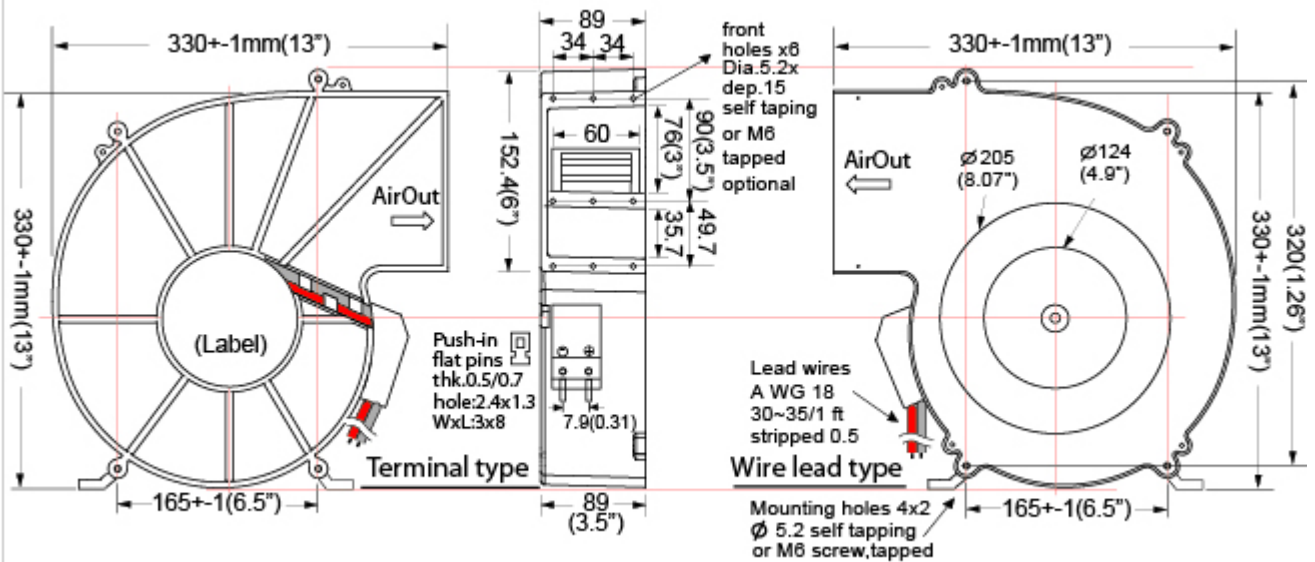




□ 330x330x89 mm



### Characteristic Curves

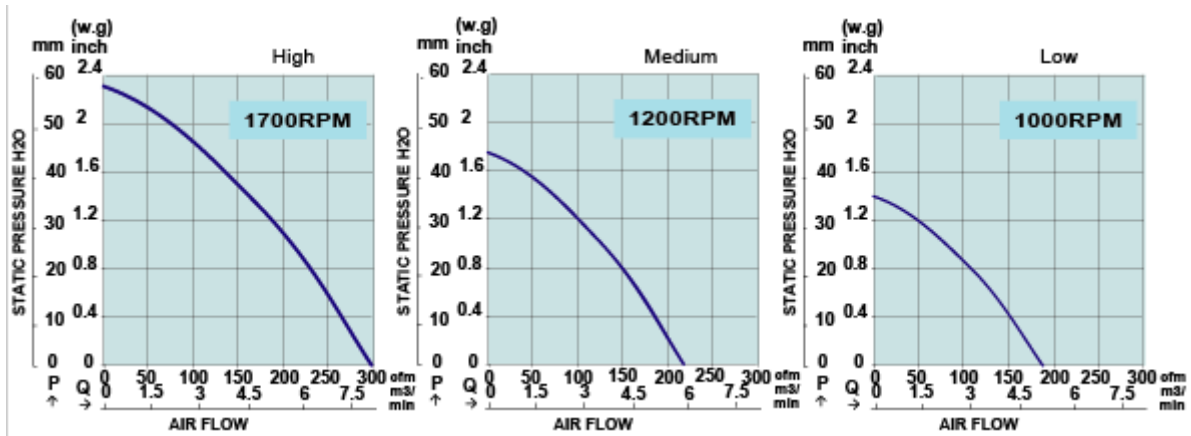

DC Blower Fan

### SPECIFICATION

Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H <sub>2</sub> O)	Noise (dB)
CDB123389HBL	12	10/10.6	120/128	1600	285	2.2	58
CDB243389HBL	24	4.8/5.3	115/128	1700	300	2.3	60
CDB483389HBL	48	2.4/2.7	115/128	1700	300	2.3	60

**Note: We also offer Medium and Low Speed**