

## □250x130 mm



2800RPM

700

Frame: Aluminum


Impeller: plastic (UL 94V-0)

Ambient Temperature Range: -10 $^{\circ}$ C  $\sim$  +70 $^{\circ}$ C

Bearing: Ball Weight: 2000 g

## **Dimension (units:mm)**

## **Characteristic Curves**

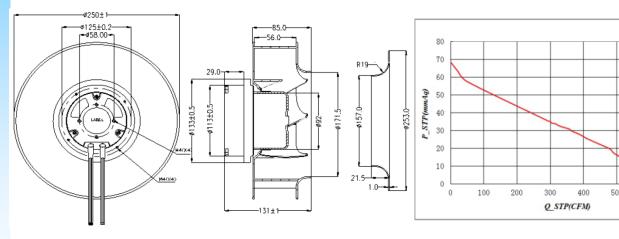

## **SPECIFICATION**

Model	Voltage (V)	Operating Range(V)		Power (W)	Speed (RPM)		Air Flow (m3/min)	Pressure (in-H2O)	Noise (dB)
CYEC12513HB	110	80-135	50/60	123	2800	657	18.6	2.7	74
CYEC22513HB	220	180-265							

- If you want another RPM or Voltage or Functions which not in the list. Please contact with us. We can customize for you.
- Specifications are subject to change without notice.