



# 6030 Series



**Frame:** Steel

**Impeller:** Aluminum UL94V-0


**Ambient Temperature Range:** -10°C ~ +70°C

**Bearing:** Ball bearing

**Motor Structure:** Shaded pole or Capacity induction

**Package:** 2 kg / PC

## Dimension (units:mm)

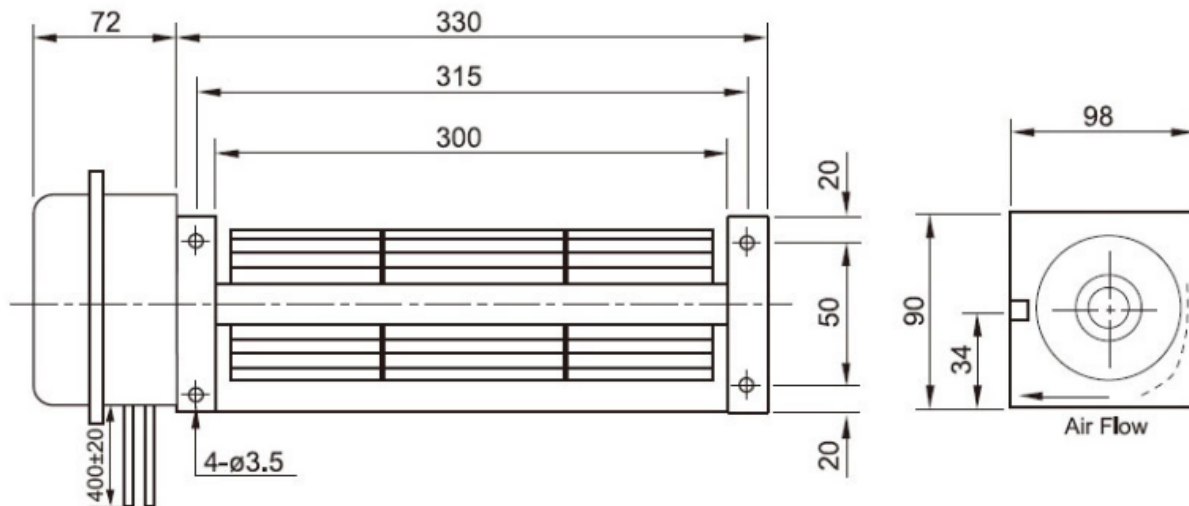

## SPECIFICATION

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (CFM)	Pressure (mm Aq)	Noise (dB)
CYF16030HB	120	50/60	35/37	0.33/0.33	2600/3000	177/195	5/7.5	50/53
CYF26030HB	230	50/60	35/37	0.17/0.17	2600/3000	177/195	5/7.5	50/53