



□150x150x51 mm



Frame: Die cast aluminum

Impeller: Plastic

Ambient Temperature Range: -20°C ~ +70°C

Operating Voltage Range: Rated Voltage $\pm 10\%$

Bearing: Ball


Motor Structure: AC Induction Capacitor Motor

Motor protection: Thermal Protected (Auto Restart) optional IP54, IP56, IP67


Termination: Terminals or Lead wire

Weight: 920g/ PC

Dimension (units:mm)

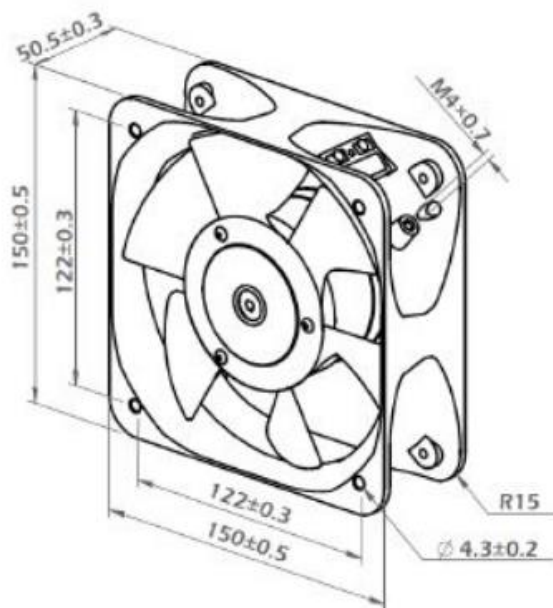

Characteristic Curves

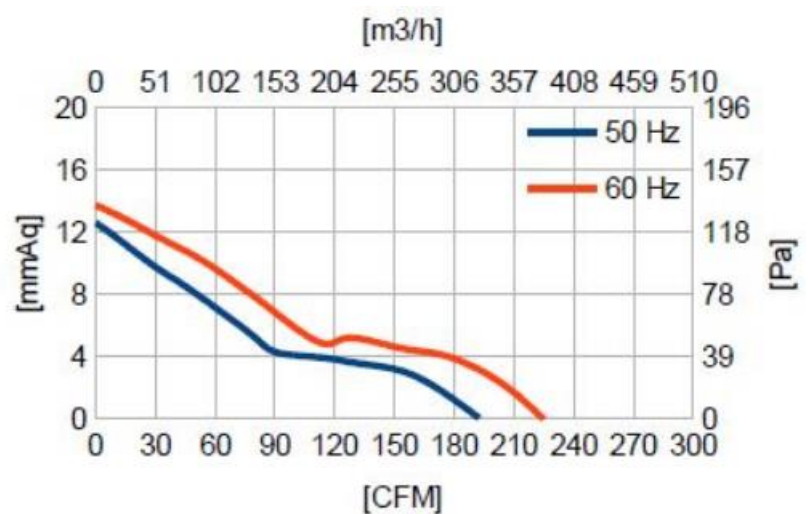

SPECIFICATION

Model	Voltage (V)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mm Aq)	Noise (dB)	UL
CY11551HB	115	50/60	0.25/0.21	27/25	2700/3100	210/250	14/15.5	53/59	
CY21551HB	230	50/60	0.11/0.11	24/24	2700/3100	210/250	14/15.5	53/59	