



205x205x72 mm (8x8x2.8 in)



Frame: Die cast aluminum

Impeller: Plastic (UL 94V-0 P.B.T)

Ambient Temperature Range: -20°C ~ +70°C

Operating Voltage Range: Rated Voltage $\pm 10\%$

Bearing: Ball bearing


Motor Structure: Capacitor induction

Motor protection: Thermally protected


Termination: Terminals or Lead wire

Weight: 2000g / PC

Dimension (units:mm)

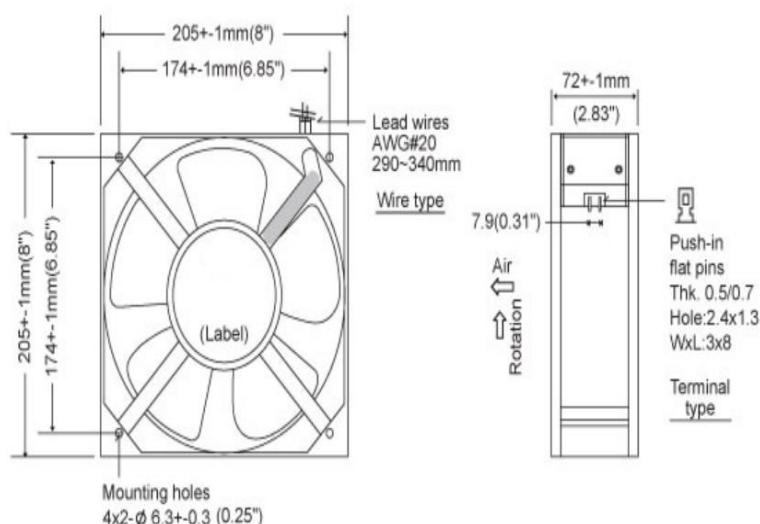

Characteristic Curves

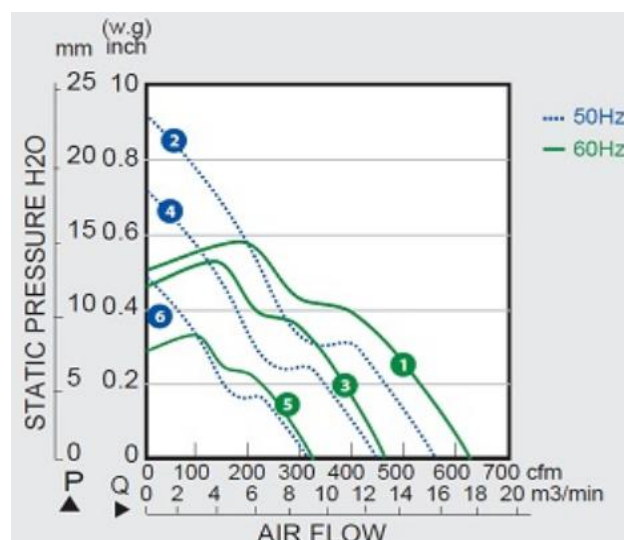

SPECIFICATION

Model	Voltage (V)	Freq. (Hz)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mm Aq)	Noise (dB)
CY12072HB	115	50/60	60/75	2800/3150	587/660	23.11/17.78	69
CY22072HB	230	50/60	60/75	2800/3150	587/660	23.11/17.78	69