



ø254x107 mm
(ø10x4.21 in)



Frame: Die cast aluminum

Impeller: Plastic (UL 94V-0 P.B.T)

Ambient Temperature Range: -20°C ~ +70°C

Operating Voltage Range: Rated Voltage ±10%

Bearing: Ball & Sleeve bearing


Motor Structure: Capacitor induction

Motor protection: Thermally or Impedance protected


Termination: Terminals or Lead wire

Weight: 2500g / PC

Dimension (units:mm)

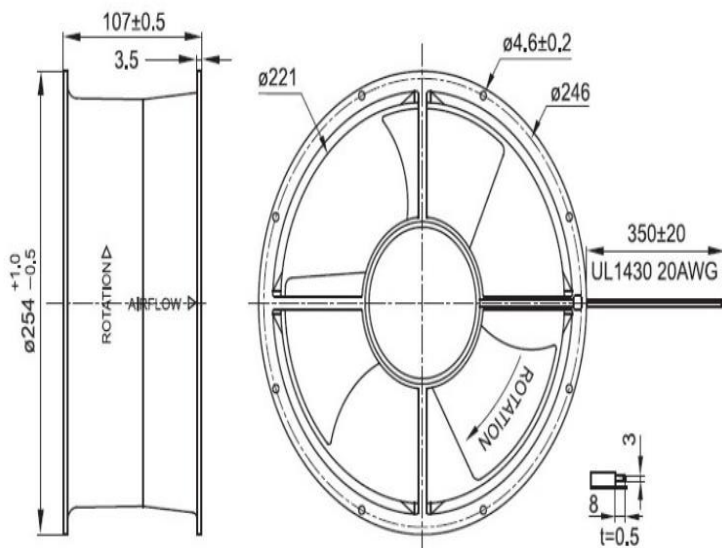

Characteristic Curves

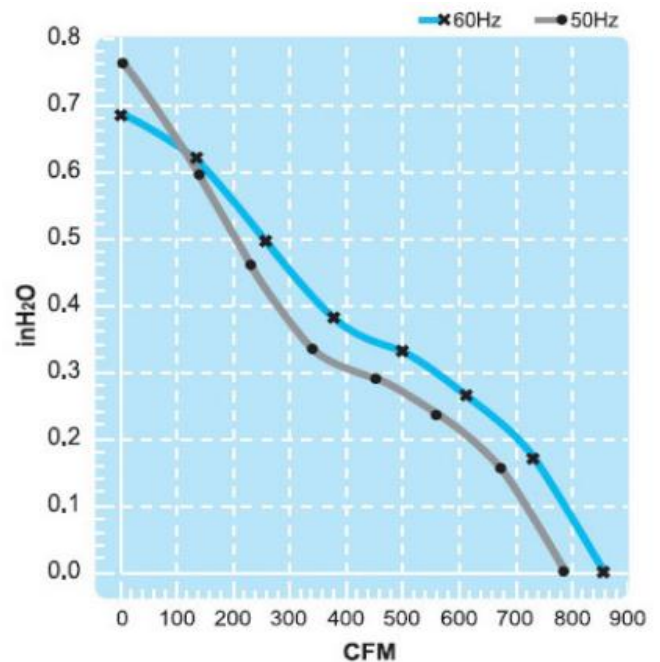

SPECIFICATION

Model	Voltage (V)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mm Aq)	Noise (dB)
CY12511HB	115	50/60	0.85/1.07	95/125	2600/2750	780/850	19/17.5	63/65
CY22511HB	230	50/60	0.42/0.5	95/125	2600/2750	780/850	19/17.5	63/65