



□280x280x89 mm (□11x11x3.5 in)



Frame: Die cast aluminum

Impeller: 7 blades, all metal

Ambient Temperature Range: -30°C ~ +80°C

Operating Voltage Range: Rated Voltage ±10%

Bearing: Ball bearing


Motor Structure: Capacitor induction, single-phase

Motor protection: Thermal Protect


Termination: Terminals or Lead wire

Package: 3400g / PC

Dimension (units:mm)

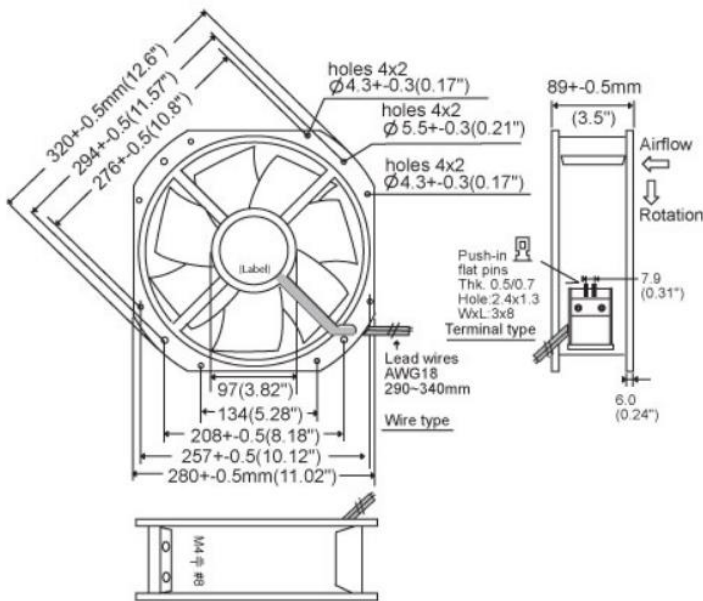

Characteristic Curves

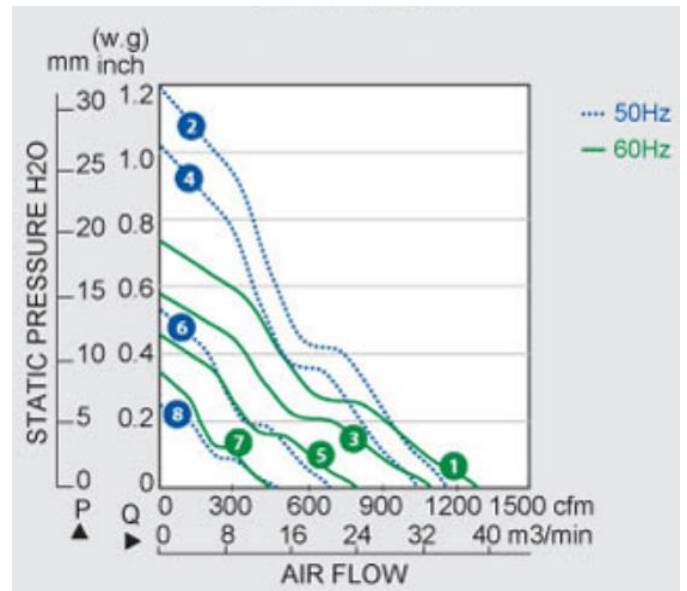

SPECIFICATION

Model	Voltage (V)	Freq. (Hz)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mm Aq)	Noise (dB)
CYM12890HB	115	50/60	155/210	2800/3200	1150/1300	30.48/19.05	73
CYM22890HB	230	50/60	155/210	2800/3200	1150/1300	30.48/19.05	73