



□ 120x120x25mm



Frame: Plastic

Impeller: Plastic Material UL94V-0 P.B.T


Ambient Temperature Range: -10°C ~ +70°C

Bearing: Ball


Motor Structure: DC Brushless Motor

Package: 155g / PC

Dimension (units:mm)

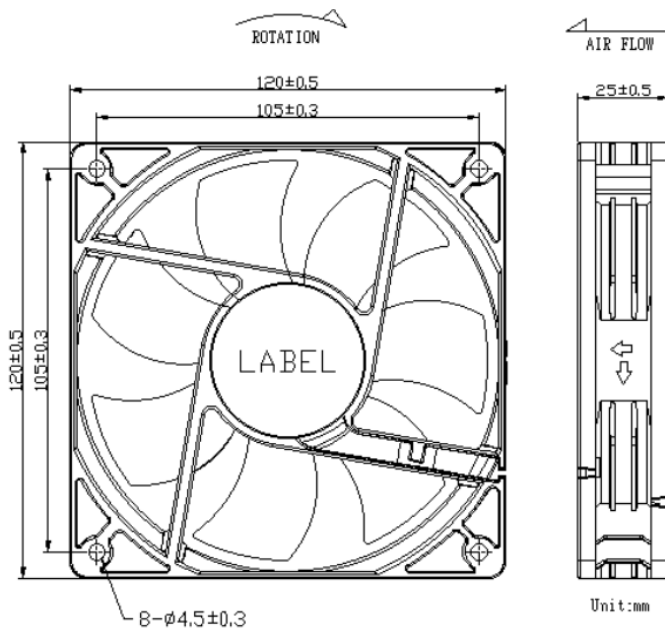

Characteristic Curves

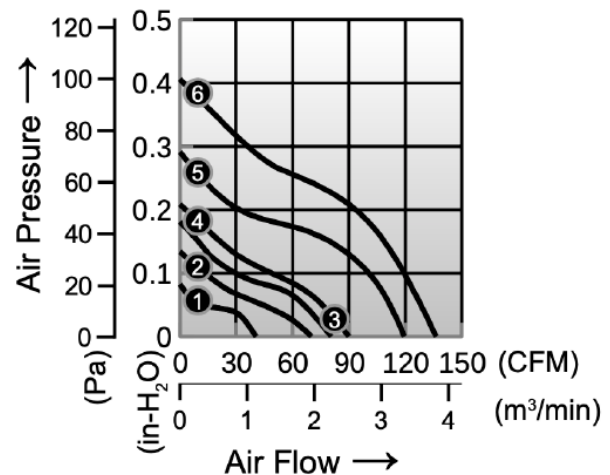

SPECIFICATION

Model	Voltage (V)	Operating Voltage Range(VDC)	Current (A)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H ₂ O)	Noise (dB)
CDD121225HB	12	7~13.2	0.28	2500	111.20	0.22	44
CDD121225XB	12	7~13.2	0.47	3100	125.40	0.29	48
CDD121225UB	12	7~13.2	1.00	4000	161.80	0.48	54
CDD241225HB	24	12~26.4	0.25	2500	111.20	0.22	44
CDD241225XB	24	12~26.4	0.30	3100	125.40	0.29	48
CDD241225UB	24	12~26.4	0.50	4000	161.80	0.48	54
CDD481225HB	48	24~56	0.10	2500	111.20	0.22	44
CDD241225XB	48	24~56	0.12	3100	125.40	0.29	48
CDD481225UB	48	24~56	0.28	4000	161.80	0.48	54