



□ 120x120x32 mm

Frame: Plastic

Impeller: Plastic Material UL94V-0

Ambient Temperature Range: -10°C ~ +70°C


Bearing: Ball, Sleeve, FMB

Motor Structure: DC Brushless Motor


Package: 230 g / PC



Dimension (units:mm)

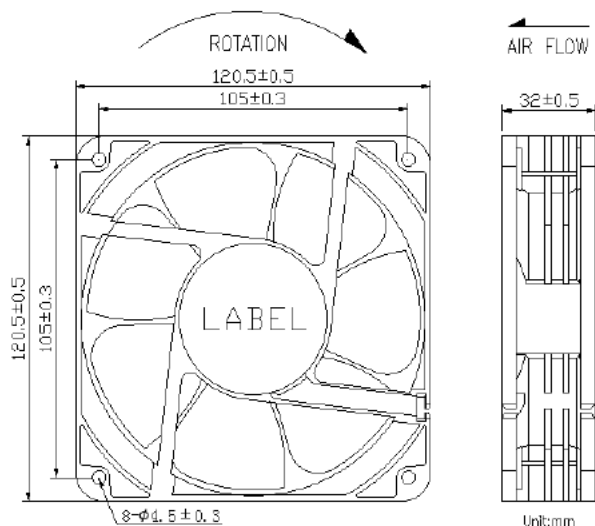

Characteristic Curves

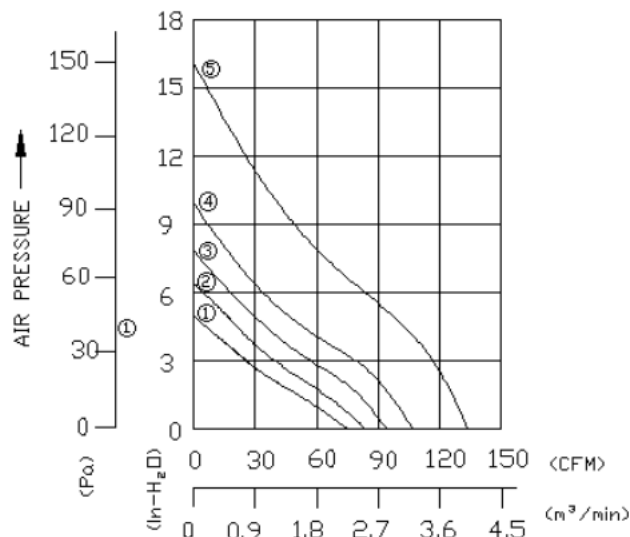

SPECIFICATION

Model	Voltage (V)	Operating Voltage Range(VDC)	Current (A)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H ₂ O)	Noise (dB)
CD121232LB	12	7.0 – 13.2	0.40	2600	85.40	0.26	40
CD121232MB	12	7.0 – 13.2	0.48	2900	95.20	0.32	42
CD121232HB	12	7.0 – 13.2	0.58	3200	105.00	0.39	44
CD121232XB	12	7.0 – 13.2	0.80	4000	131.20	0.60	49
CD241232LB	24	14.0 – 26.4	0.20	2600	85.40	0.26	40
CD241232MB	24	14.0 – 26.4	0.23	2900	95.20	0.32	42
CD241232HB	24	14.0 – 26.4	0.28	3200	105.00	0.39	44
CD241232XB	24	14.0 – 26.4	0.40	4000	131.20	0.60	49
CD481232LB	48	28.0 – 56.0	0.10	2600	85.40	0.26	40
CD481232MB	48	28.0 – 56.0	0.12	2900	95.20	0.32	42
CD481232HB	48	28.0 – 56.0	0.15	3200	105.00	0.39	44
CD481232XB	48	28.0 – 56.0	0.20	4000	131.20	0.60	49