



□ 120x120x38 mm

Frame: Plastic

Impeller: Plastic Material UL94V-0

Ambient Temperature Range: -10°C ~ +70°C


Bearing: Ball, Sleeve, FMB

Motor Structure: DC Brushless Motor


Package: 280 g / PC



Dimension (units:mm)

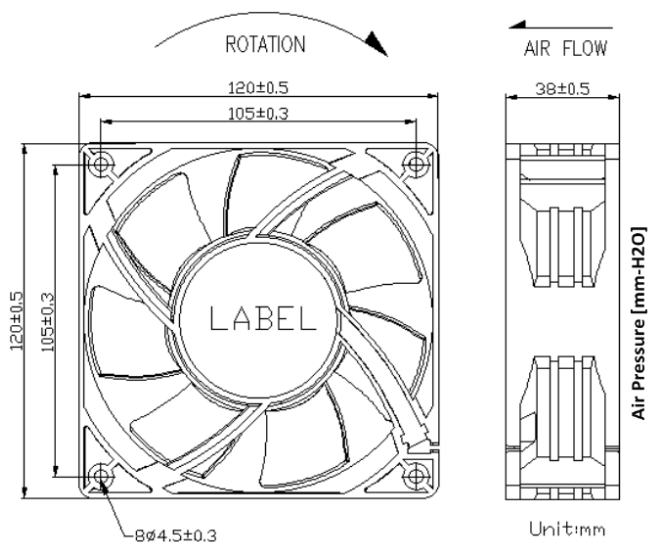

Characteristic Curves

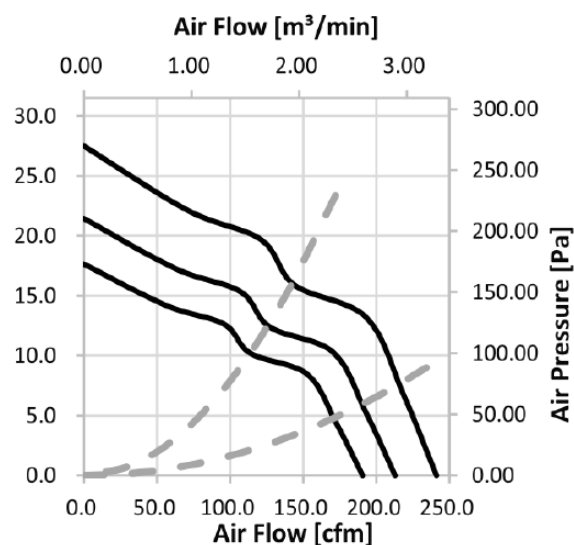

SPECIFICATION

Model	Voltage (V)	Operating Voltage Range(VDC)	Current (A)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H2O)	Noise (dB)
CDD121238JB	12	7.0 – 13.2	1.35	4100	190.50	0.60	56
CDD121238LB	12	7.0 – 13.2	1.80	4600	212.60	0.84	59
CDD121238MB	12	7.0 – 13.2	2.90	5200	241.00	1.08	62
CDD241238JB	24	14.0 – 26.4	0.60	4100	190.50	0.60	56
CDD241238LB	24	14.0 – 26.4	0.90	4600	212.60	0.84	59
CDD241238MB	24	14.0 – 26.4	1.30	5200	241.00	1.08	62
CDD481238JB	48	28.0 – 56.0	0.30	4100	190.50	0.60	56
CDD481238LB	48	28.0 – 56.0	0.55	4600	212.60	0.84	59
CDD481238MB	48	28.0 – 56.0	0.65	5200	241.00	1.08	62