



□ 140x140x38 mm

Frame: Plastic

Impeller: Plastic Material UL94V-0

Ambient Temperature Range: -10°C ~ +70°C


Bearing: Ball,

Motor Structure: DC Brushless Motor


Package: 335 g / PC



Dimension (units:mm)

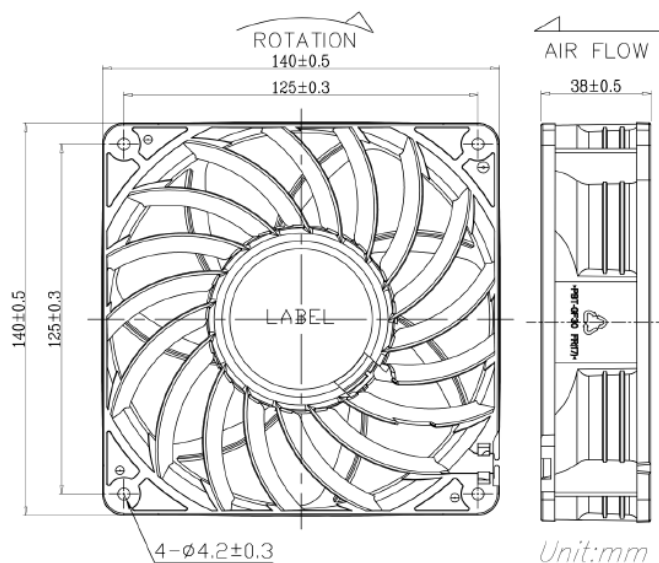

Characteristic Curves

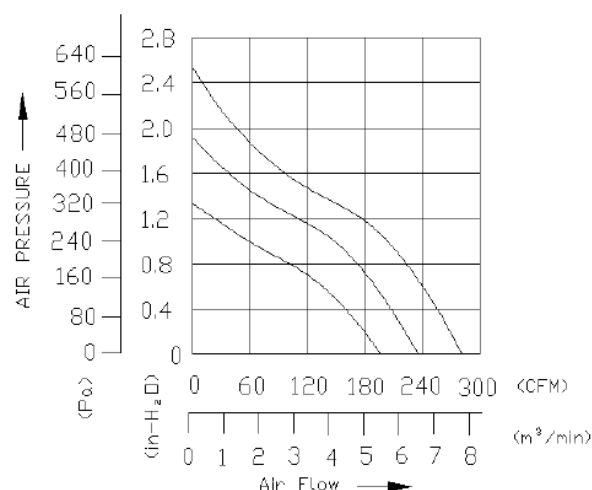

SPECIFICATION

Model	Voltage (V)	Operating Voltage Range(VDC)	Current (A)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H2O)	Noise (dB)
CD241438HB	24	14.0 – 26.4	1.00	3500	141.80	0.65	55
CD241438XB	24	14.0 – 26.4	1.20	4500	182.30	1.08	61
CD241438UB	24	14.0 – 26.4	1.80	5500	222.80	1.61	65
CD24438WB	24	14.0 – 26.4	2.00	6500	263.30	2.25	68
CD241438FB	24	14.0 – 26.4	2.40	7000	283.60	2.60	69
CD481438MB	48	28.0 – 56.0	0.52	3500	162.00	0.85	58
CD481438HB	48	28.0 – 56.0	0.65	4500	182.30	1.08	61
CD481438XB	48	28.0 – 56.0	0.88	5500	202.60	1.33	63
CD481438UB	48	28.0 – 56.0	1.10	6500	222.80	1.61	65
CD481438WB	48	28.0 – 56.0	1.60	7000	243.10	1.91	67
CD481438FB	48	28.0 – 56.0	2.00	7500	303.80	2.99	70