



□ 172x150x51 mm

Frame: Plastic

Impeller: Plastic Material UL94V-0

Ambient Temperature Range: -10°C ~ +70°C


Bearing: Ball,

Motor Structure: DC Brushless Motor


Package: 700 g / PC



Dimension (units:mm)

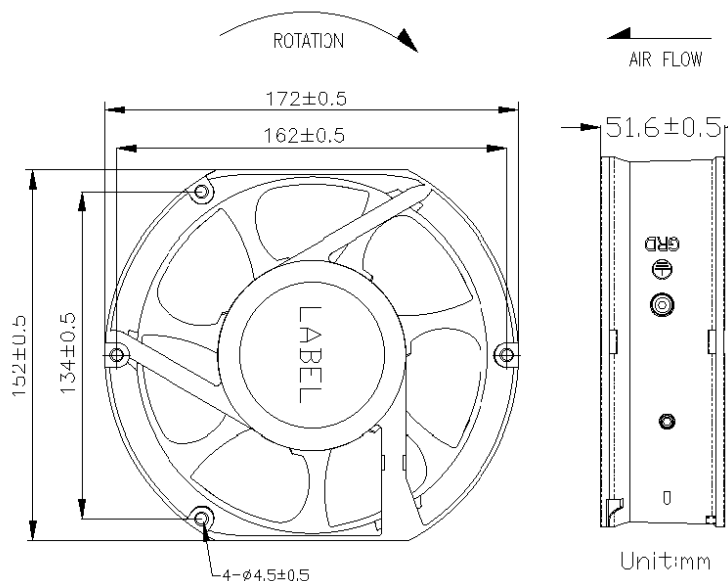

Characteristic Curves

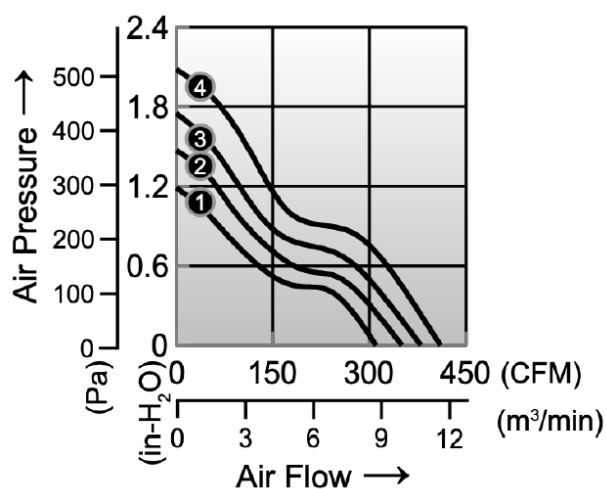

SPECIFICATION

Model	Voltage (V)	Operating Voltage Range(VDC)	Current (A)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H2O)	Noise (dB)
CDF241751LB	24	14.0 – 26.4	1.60	4000	310.60	1.19	60
CDF241751MB	24	14.0 – 26.4	2.30	4400	350.50	1.47	62
CDF241751HB	24	14.0 – 26.4	2.80	4800	380.30	1.75	64
CDF241751XB	24	14.0 – 26.4	3.60	5200	410.50	2.08	67
CDF481751LB	48	28.0 – 56.0	0.90	4000	310.60	1.19	60
CDF481751MB	48	28.0 – 56.0	1.20	4400	350.50	1.47	62
CDF481751HB	48	28.0 – 56.0	1.50	4800	380.30	1.75	64
CDF481751XB	48	28.0 – 56.0	1.80	5200	40.50	2.08	67