



□172x51 mm

Frame: Plastic

Impeller: Plastic Material UL94V-0

Ambient Temperature Range: -10°C ~ +70°C


Bearing: Ball,

Motor Structure: DC Brushless Motor


Package: 700 g / PC



Dimension (units:mm)

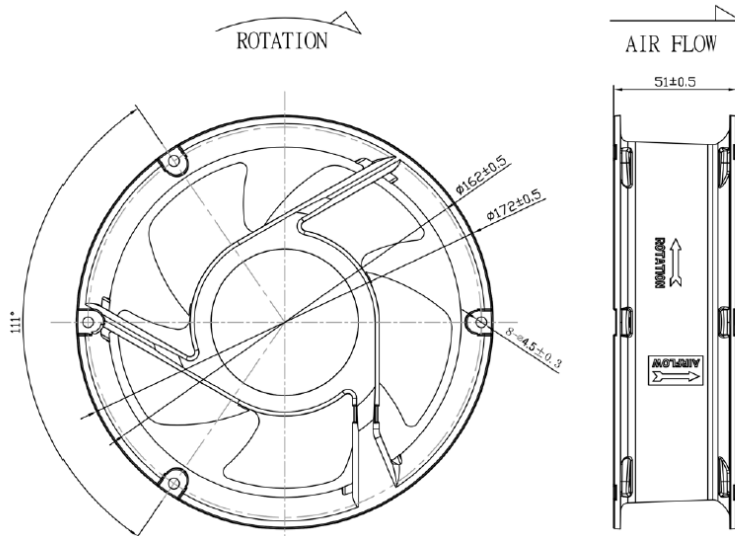

Characteristic Curves

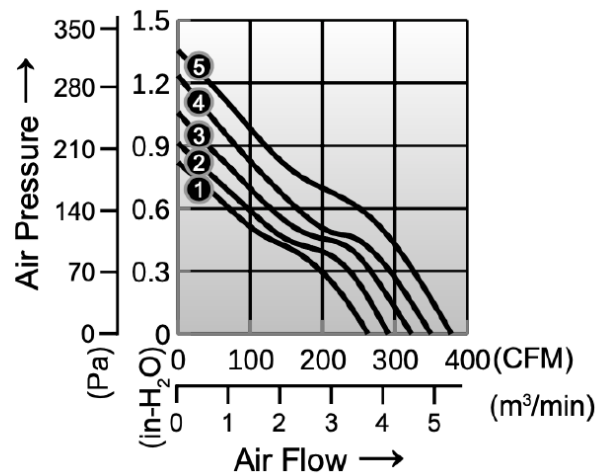

SPECIFICATION

Model	Voltage (V)	Operating Voltage Range(VDC)	Current (A)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H ₂ O)	Noise (dB)
CDR241751LB	24	14.0 – 26.4	1.25	4000	291.00	0.91	62
CDR241751MB	24	14.0 – 26.4	1.55	4400	323.00	1.06	64
CDR241751HB	24	14.0 – 26.4	1.85	4800	350.00	1.24	66
CDR241751XB	24	14.0 – 26.4	2.25	5200	378.00	1.36	68
CDR241751UB	24	14.0 – 26.4	5.00	6500	472.50	2.12	73
CDR481751LB	48	28.0 – 56.0	0.65	4000	291.00	0.91	62
CDR481751MB	48	28.0 – 56.0	0.80	4400	323.00	1.06	64
CDR481751HB	48	28.0 – 56.0	0.95	4800	350.00	1.24	66
CDR481751XB	48	28.0 – 56.0	1.30	5200	378.00	1.36	68
CDR481751UB	48	28.0 – 56.0	2.30	6500	472.50	2.12	73
CDR481751WB	48	28.0 – 56.0	3.50	7500	545.19	2.82	76
CDR481751FB	48	28.0 – 56.0	4.20	8000	581.54	3.21	78