



□ 35x35x10 mm



Frame: Plastic

Impeller: Plastic Material UL94V-0


Ambient Temperature Range: -10°C ~ +70°C

Bearing: FMB/ball


Motor Structure: DC Brushless Motor

Package: 11g / PC

Dimension (units:mm)

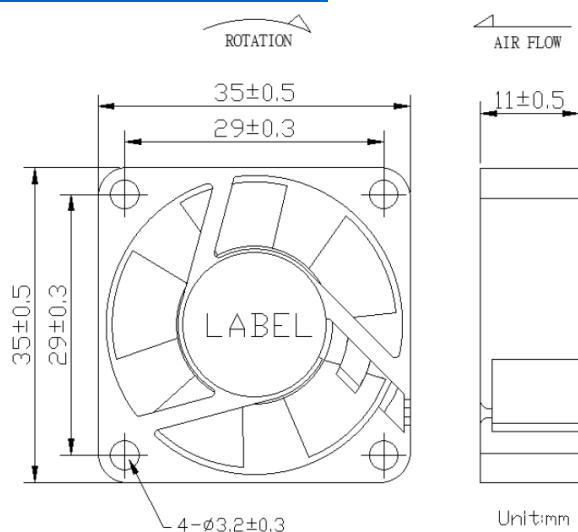

Characteristic Curves

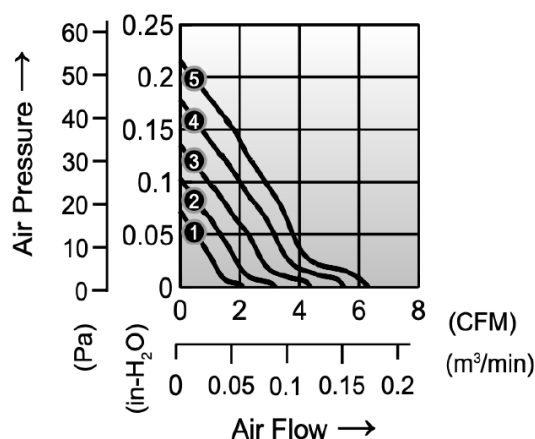

SPECIFICATION

Model	Voltage (V)	Operating Voltage Range(VDC)	Current (A)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H ₂ O)	Noise (dB)
CD053510MB	5	4.5 – 5.5	0.11	5000	2.10	0.09	18
CD053510HB	5	4.5 – 5.5	0.12	6000	3.17	0.14	20
CD053510XB	5	4.5 – 5.5	0.17	7000	4.37	0.21	23
CD053510UB	5	4.5 – 5.5	0.19	8000	5.51	0.24	25
CD053510WB	5	4.5 – 5.5	0.20	9000	6.30	0.30	28
CD123510XB	12	7.0 – 13.2	0.08	7000	4.37	0.14	23
CD123510UB	12	7.0 – 13.2	0.09	8000	5.51	0.24	25
CD123510WB	12	7.0 – 13.2	0.12	9000	6.30	0.30	28
CD123510FB	12	7.0 – 13.2	0.13	10000	7.00	0.38	31