



□ 40x40x20 mm



Frame: Plastic

Impeller: Plastic Material UL94V-0


Ambient Temperature Range: -10°C ~ +70°C

Bearing: Ball/Sleeve


Motor Structure: DC Brushless Motor

Package: 27g / PC

Dimension (units:mm)

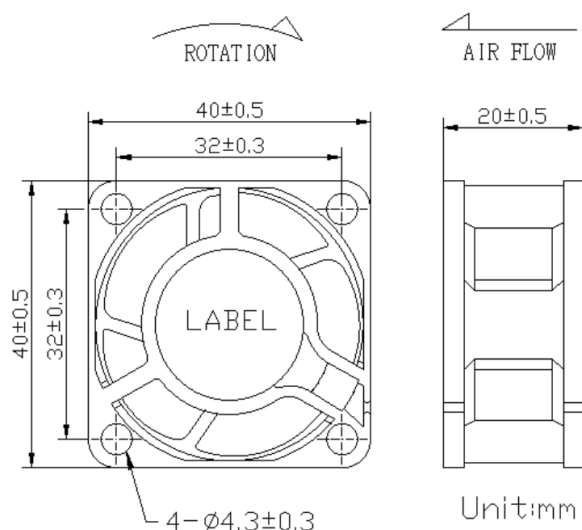

Characteristic Curves

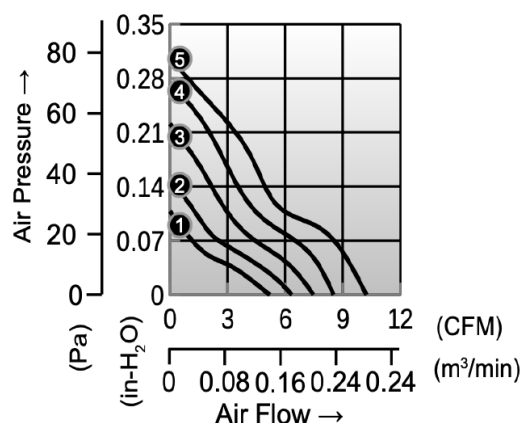

SPECIFICATION

Model	Voltage (V)	Operating Voltage Range(VDC)	Current (A)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H ₂ O)	Noise (dB)
CD124020LB	12	4.5 – 5.5	0.08	5000	6.70	0.19	23
CD124020MB	12	7.0 – 13.2	0.12	6500	8.40	0.32	27
CD124020HB	12	7.0 – 13.2	0.16	8600	9.80	0.43	36
CD124020XB	12	7.0 – 13.2	0.21	9500	11.00	0.47	37
CD244020LB	24	14.0 – 26.4	0.07	5000	6.70	0.19	23
CD244020MB	24	14.0 – 26.4	0.09	6500	8.40	0.32	27
CD244020HB	24	14.0 – 26.4	0.13	8600	9.80	0.43	36
CD244015XB	24	14.0 – 26.4	0.17	9500	11.00	0.47	37