



□ 40x40x20 mm

Frame: Plastic

Impeller: Plastic Material UL94V-0

Ambient Temperature Range: -10°C ~ +70°C


Bearing: Ball

Motor Structure: DC Brushless Motor


Package: 45 g / PC



Dimension (units:mm)

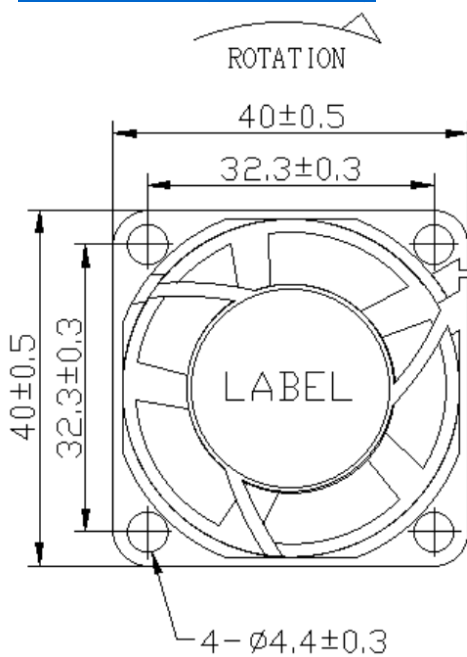


AIR FLOW

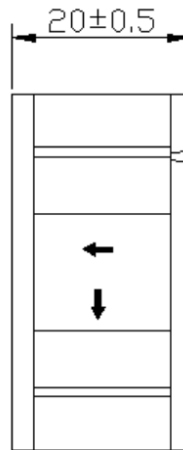

Unit:mm

Characteristic Curves

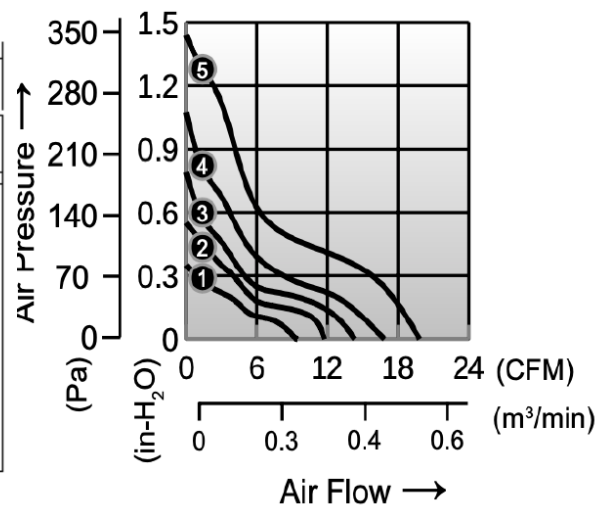

SPECIFICATION

Model	Voltage (V)	Operating Voltage Range(VDC)	Current (A)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H2O)	Noise (dB)
CDB124020LB	12	7.0 – 13.2	0.08	8000	9.4	0.35	33
CDB124020MB	12	7.0 – 13.2	0.11	10000	11.7	0.55	40
CDB124020HB	12	7.0 – 13.2	0.17	12000	14.3	0.79	44
CDB124020XB	12	7.0 – 13.2	0.25	14000	16.8	1.08	49
CDB124020UB	12	7.0 – 13.2	0.41	16000	19.8	1.44	53
CDB244020HB	24	14.0 – 26.4	0.14	12000	14.3	0.79	44
CDB244020XB	24	14.0 – 26.4	0.20	14000	16.8	1.08	49
CDB244020UB	24	14.0 – 26.4	0.25	16000	19.8	1.44	53