



□ 50x50x15 mm

Frame: Plastic

Impeller: Plastic Material UL94V-0

Ambient Temperature Range: -10°C ~ +70°C


Bearing: Ball, FMB

Motor Structure: DC Brushless Motor


Package: 38 g / PC



Dimension (units:mm)

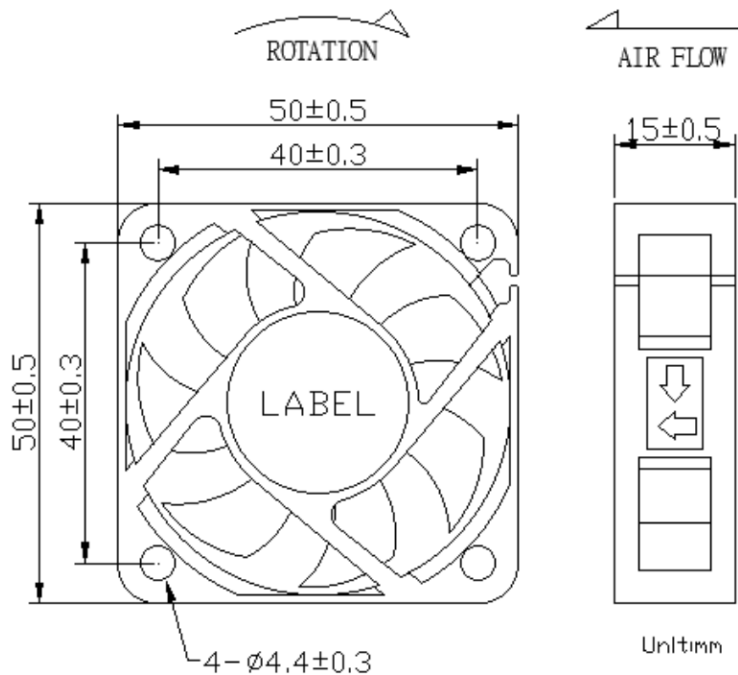

Characteristic Curves

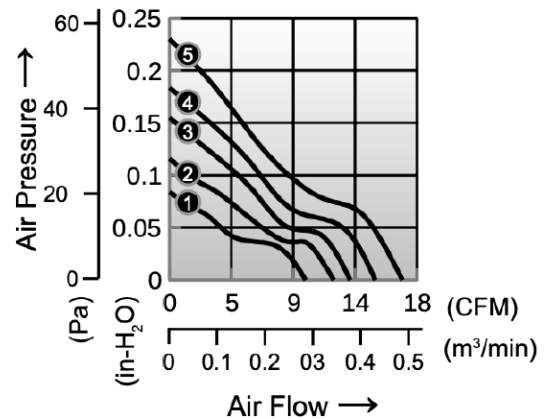

SPECIFICATION

Model	Voltage (V)	Operating Voltage Range(VDC)	Current (A)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H ₂ O)	Noise (dB)
CDC055015XB	5	4.5 – 5.5	0.24	6000	17.0	0.23	33
CDC125015LB	12	7.0 – 13.2	0.07	4200	12.2	0.12	27
CDC125015MB	12	7.0 – 13.2	0.09	4800	13.2	0.16	30
CDC125015HB	12	7.0 – 13.2	0.11	5400	15.0	0.18	32
CDC125015XB	12	7.0 – 13.2	0.13	6000	17.0	0.23	36
CDC245015JB	24	14.0 – 26.4	0.04	3600	9.91	0.08	24
CDC245015LB	24	14.0 – 26.4	0.05	4200	12.2	0.12	27
CDC245015MB	24	14.0 – 26.4	0.06	4800	13.2	0.16	30
CDC245015HB	24	14.0 – 26.4	0.07	5400	15.0	0.18	32
CDC245015XB	24	14.0 – 26.4	0.08	6000	17.0	0.23	36