



□ 52x52x10 mm

Frame: Plastic

Impeller: Plastic Material UL94V-0

Ambient Temperature Range: -10°C ~ +70°C


Bearing: Ball, FMB

Motor Structure: DC Brushless Motor


Package: 32 g / PC



Dimension (units:mm)

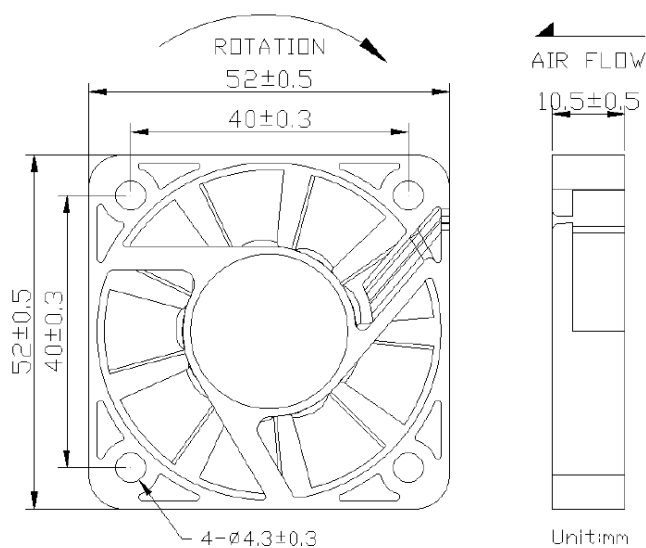

Characteristic Curves

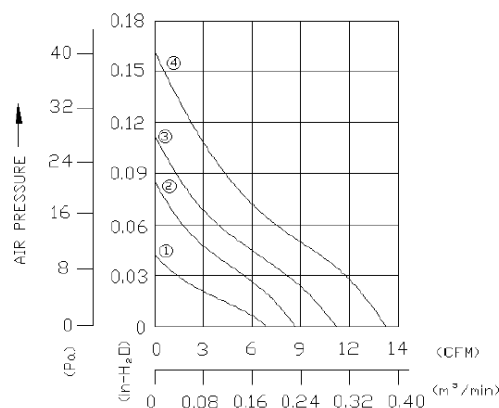

SPECIFICATION

Model	Voltage (V)	Operating Voltage Range(VDC)	Current (A)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H ₂ O)	Noise (dB)
CD055210LB	5	4.5 – 5.5	0.12	4000	8.90	0.07	30
CD055210MB	5	4.5 – 5.5	0.16	5000	11.13	0.11	34
CD055210HB	5	4.5 – 5.5	0.20	6000	13.36	0.16	38
CD125210JB	12	7.0 – 13.2	0.05	3000	6.68	0.04	24
CD125210LB	12	7.0 – 13.2	0.07	4000	8.90	0.07	30
CD125210MB	12	7.0 – 13.2	0.08	5000	11.13	0.11	34
CD125210HB	12	14.0 – 26.4	0.10	6000	13.36	0.16	38
CD245210JB	24	14.0 – 26.4	0.06	3000	6.68	0.04	24
CD245210LB	24	14.0 – 26.4	0.07	4000	8.90	0.07	30
CD245210MB	24	14.0 – 26.4	0.08	5600	11.13	0.11	34
CD245210HB	24	14.0 – 26.4	0.09	6000	13.36	0.16	38