



□ 60x60x25 mm

Frame: Plastic

Impeller: Plastic Material UL94V-0

Ambient Temperature Range: -10°C ~ +70°C


Bearing: Ball, FMB.

Motor Structure: DC Brushless Motor


Package: 60 g / PC



Dimension (units:mm)

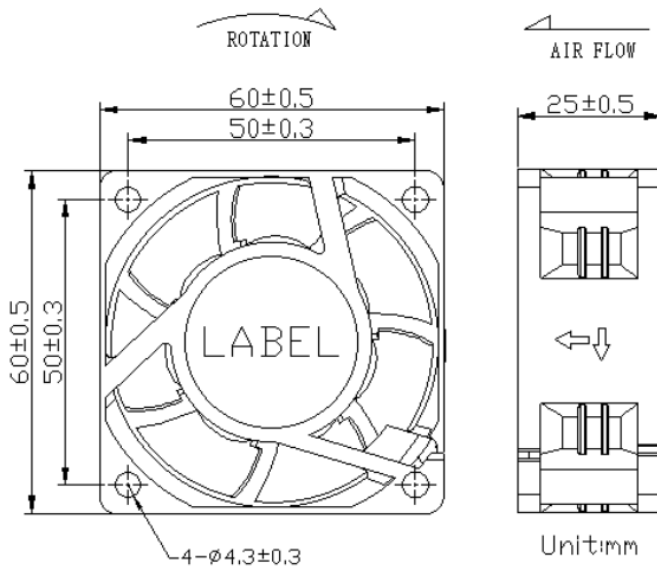

Characteristic Curves

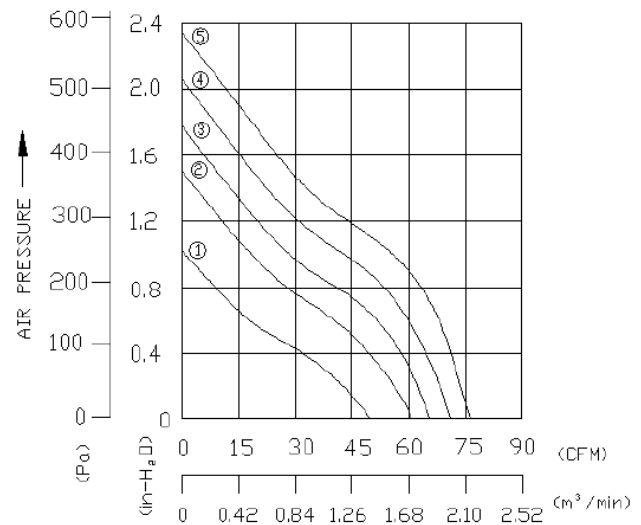

SPECIFICATION

Model	Voltage (V)	Operating Voltage Range(VDC)	Current (A)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H ₂ O)	Noise (dB)
CDA126025LB	12	7.0 – 13.2	0.08	10000	50.45	1.04	50
CDA126025HB	12	7.0 – 13.2	1.20	12000	60.54	1.50	54
CDA126025XB	12	7.0 – 13.2	1.50	13000	65.60	1.76	56
CDA246025LB	24	14.0 – 26.4	0.60	10000	50.45	1.04	50
CDA246025HB	24	14.0 – 26.4	0.82	12000	60.54	1.50	54
CDA246025XB	24	14.0 – 26.4	1.00	13000	65.60	1.76	56
CDA246025UB	24	14.0 – 26.4	1.20	14000	70.65	2.04	57
CDA246025WB	24	14.0 – 26.4	2.00	15000	75.70	2.34	59
CDA486025LB	48	28.0 – 56.0	0.30	10000	50.45	1.04	50
CDA486025HB	48	28.0 – 56.0	0.40	12000	60.54	1.50	54
CDA486025XB	48	28.0 – 56.0	0.55	13000	65.60	1.76	56
CDA486025UB	48	28.0 – 56.0	0.65	14000	70.65	2.04	57
CDA486025WB	48	28.0 – 56.0	1.00	15000	75.70	2.34	59