



□ 60x60x25 mm

Frame: Plastic

Impeller: Plastic Material UL94V-0

Ambient Temperature Range: -10°C ~ +70°C


Bearing: Ball, FMB.

Motor Structure: DC Brushless Motor


Package: 60 g / PC



Dimension (units:mm)

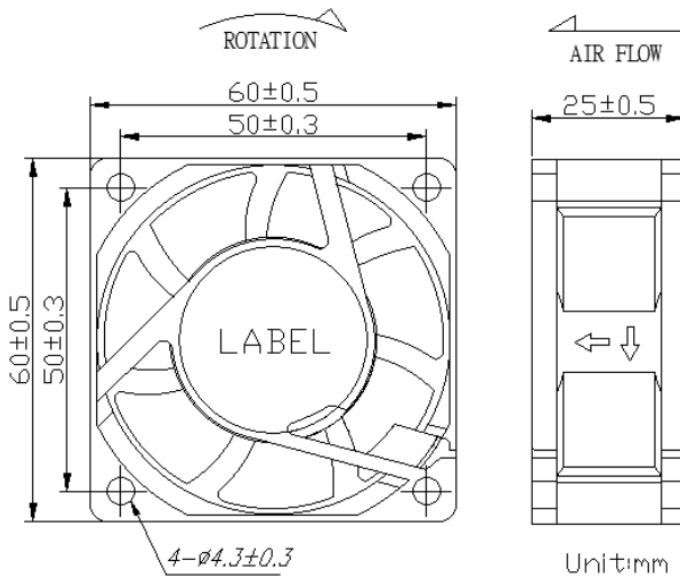

Characteristic Curves

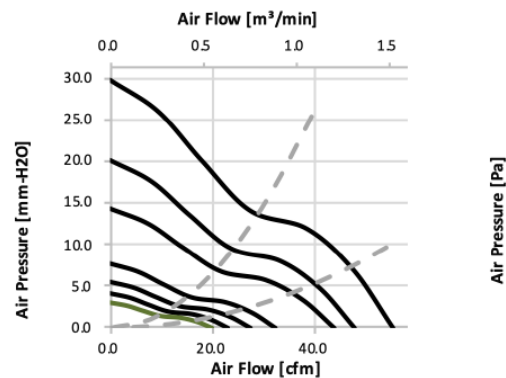

SPECIFICATION

Model	Voltage (V)	Operating Voltage Range(VDC)	Current (A)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H ₂ O)	Noise (dB)
CDF126025LB	12	7.0 – 13.2	0.12	3600	21.50	0.16	31
CDF126025HB	12	7.0 – 13.2	0.30	5000	33.60	0.25	40
CDF126025UB	12	7.0 – 13.2	0.60	7500	47.90	0.79	63
CDF126025WB	12	7.0 – 13.2	1.20	9800	55.50	1.17	66
CDF246025LB	24	14.0 – 26.4	0.06	3600	21.50	0.16	31
CDF246025HB	24	14.0 – 26.4	0.16	5000	33.60	0.25	40
CDF246025UB	24	14.0 – 26.4	0.29	7500	47.90	0.79	63
CDF246025WB	24	14.0 – 26.4	0.58	9800	55.50	1.17	66
CDF486025LB	48	28.0 – 56.0	0.05	3600	21.50	0.16	31
CDF486025HB	48	28.0 – 56.0	0.10	5000	33.60	0.25	40
CDF486025UB	48	28.0 – 56.0	0.17	7500	47.90	0.79	63
CDF486025WB	48	28.0 – 56.0	0.36	9800	55.50	1.17	66
CDF606025WB	24	14.0 – 26.4	0.58	9800	55.50	1.17	66