



□ 80x80x25 mm

Frame: Plastic

Impeller: Plastic Material UL94V-0

Ambient Temperature Range: -10°C ~ +70°C


Bearing: Ball, FMB

Motor Structure: DC Brushless Motor


Package: 108 g / PC



Dimension (units:mm)

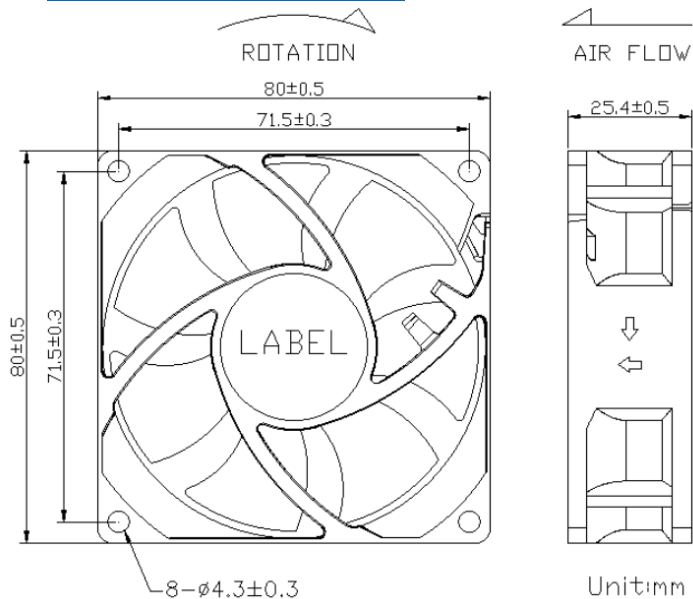

Characteristic Curves

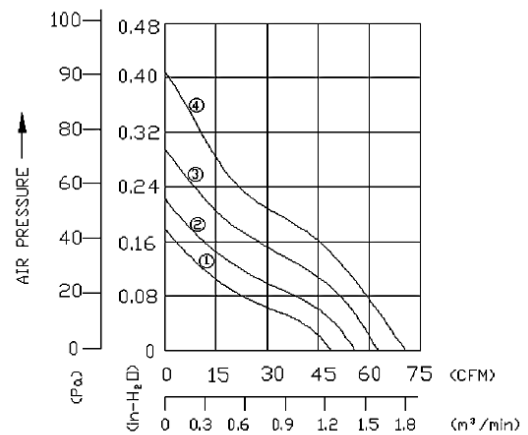

SPECIFICATION

Model	Voltage (V)	Operating Voltage Range(VDC)	Current (A)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H ₂ O)	Noise (dB)
CDA128025BL	12	7.0 – 13.2	0.20	3500	48.60	0.18	41
CDA128025MB	12	7.0 – 13.2	0.32	4000	55.50	0.23	44
CDA128025HB	12	7.0 – 13.2	0.40	4500	62,40	0.29	47
CDA128025XB	12	7.0 – 13.2	0.65	5000	69.30	0.36	49
CDA248025LB	24	14.0 – 26.4	0.12	3500	48.60	0.18	41
CDA248025MB	24	14.0 – 26.4	0.16	4000	55.50	0.23	44
CDA248025HB	24	14.0 – 26.4	0.22	4500	62,40	0.29	47
CDA248025XB	24	14.0 – 26.4	0.32	5000	69.30	0.36	49
CDA488025LB	48	28.0 – 56.0	0.10	3500	48.60	0.18	41
CDA488025MB	48	28.0 – 56.0	0.15	4000	55.50	0.23	44
CDA488025HB	48	28.0 – 56.0	0.17	4500	62,40	0.29	47