



□ 80x80x25 mm

Frame: Plastic

Impeller: Plastic Material UL94V-0

Ambient Temperature Range: -10°C ~ +70°C


Bearing: Ball,

Motor Structure: DC Brushless Motor


Package: 108 g / PC



Dimension (units:mm)

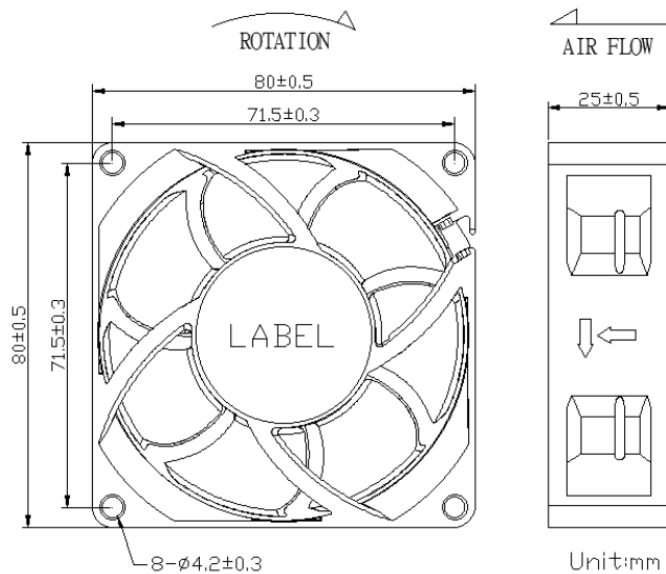

Characteristic Curves

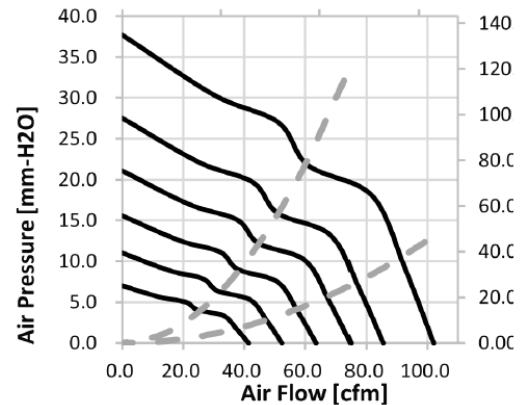

SPECIFICATION

Model	Voltage (V)	Operating Voltage Range(VDC)	Current (A)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H ₂ O)	Noise (dB)
CDK128025XB	12	7.0 – 13.2	0.54	6000	63.70	0.61	50
CDK128025UB	12	7.0 – 13.2	0.72	7000	75.00	0.83	55
CDK128025WB	12	7.0 – 13.2	0.96	8000	85.50	1.08	59
CDK128025FB	12	7.0 – 13.2	1.60	9000	96.60	1.33	62
CDK248025XB	24	14.0 – 26.4	0.29	6000	63.70	0.61	50
CDK248025UB	24	14.0 – 26.4	0.38	7000	75.00	0.83	55
CDK248025WB	24	14.0 – 26.4	0.50	8000	85.50	1.08	59
CDK248025FB	24	14.0 – 26.4	0.85	9500	102.00	1.48	63
CDK488025XB	48	28.0 – 56.0	0.20	6000	63.70	0.83	50
CDK488025UB	48	28.0 – 56.0	0.27	7000	75.00	1.07	55
CDK488025WB	48	28.0 – 56.0	0.38	8000	85.50	1.08	59
CDK488025FB	48	28.0 – 56.0	0.45	9500	102.00	1.48	63