



□ 92x92x25 mm

Frame: Plastic

Impeller: Plastic Material UL94V-0

Ambient Temperature Range: -10°C ~ +70°C


Bearing: Ball,

Motor Structure: DC Brushless Motor


Package: 85 g / PC



Dimension (units:mm)

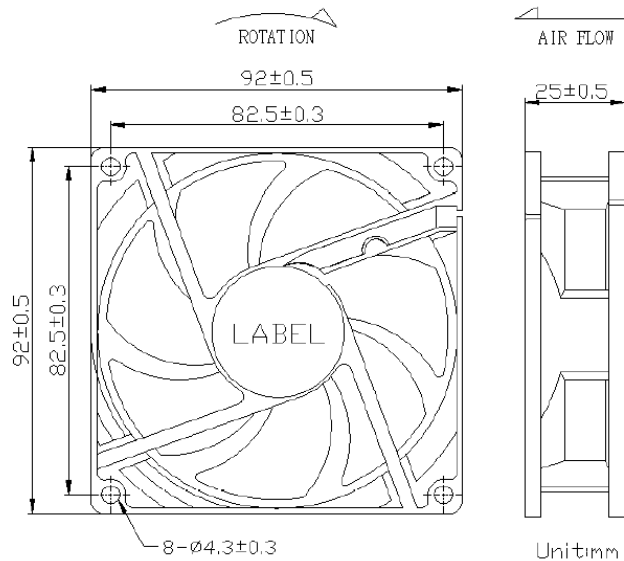

Characteristic Curves

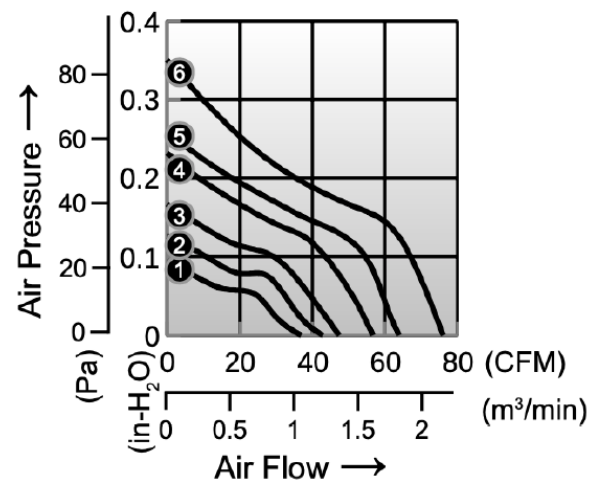

SPECIFICATION

Model	Voltage (V)	Operating Voltage Range(VDC)	Current (A)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H ₂ O)	Noise (dB)
CD129225LB	12	7.0 – 13.2	0.14	2450	43.00	0.13	30
CD129225MB	12	7.0 – 13.2	0.17	2850	47.50	0.17	34
CD129225HB	12	7.0 – 13.2	0.20	3200	56.80	0.23	38
CD129225XB	12	7.0 – 13.2	0.35	3800	64.00	0.26	45
CD129225XB	12	7.0 – 13.2	0.46	4500	76.10	0.35	49
CD249225MB	24	14.0 – 26.4	0.10	2850	47.50	0.17	34
CD249225HB	24	14.0 – 26.4	0.15	3200	56.80	0.23	38
CD249225XB	24	14.0 – 26.4	0.20	3800	64.00	0.26	45
CD249225UB	24	14.0 – 26.4	0.28	4500	76.10	0.35	49
CD489225MB	48	28.0 – 56.0	0.08	2850	47.50	0.17	34
CD489225HB	48	28.0 – 56.0	0.10	3200	56.80	0.23	38
CD489225UB	48	28.0 – 56.0	0.16	4000	67.30	0.29	46