



□ 92x92x25 mm

Frame: Plastic

Impeller: Plastic Material UL94V-0

Ambient Temperature Range: -10°C ~ +70°C


Bearing: Ball,

Motor Structure: DC Brushless Motor


Package: 96 g / PC



Dimension (units:mm)

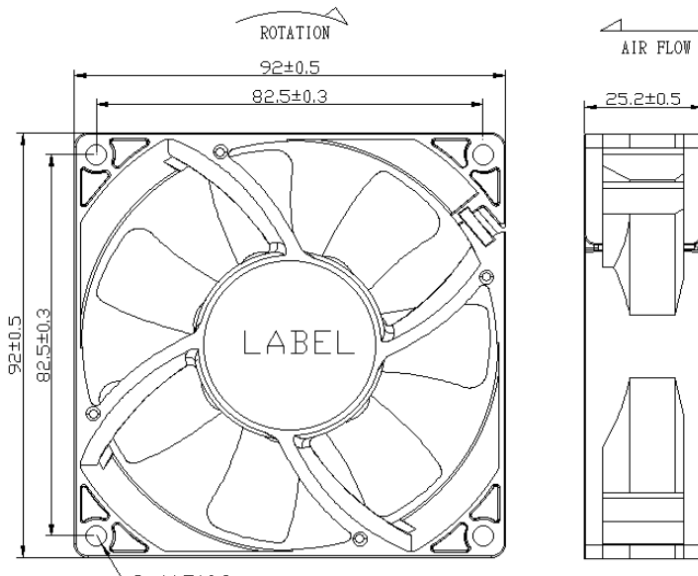

Characteristic Curves

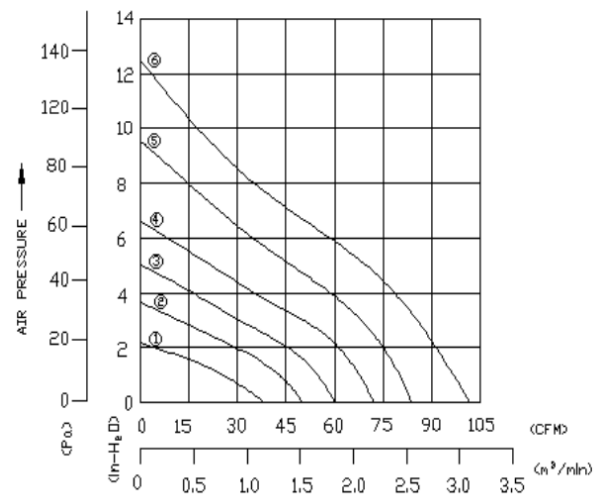

SPECIFICATION

Model	Voltage (V)	Operating Voltage Range(VDC)	Current (A)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H ₂ O)	Noise (dB)
CDD129225JB	12	7.0 – 13.2	0.10	1800	37.30	0.08	25
CDD129225LB	12	7.0 – 13.2	0.12	2300	49.52	0.13	32
CDD129225MB	12	7.0 – 13.2	0.21	2800	60.00	0.19	37
CDD129225HB	12	7.0 – 13.2	0.32	3300	72.80	0.26	43
CDD129225XB	12	7.0 – 13.2	0.40	3800	81.50	0.35	46
CDD129225UB	12	7.0 – 13.2	0.75	4800	102.60	0.53	53
CDD249225JB	24	14.0 – 26.4	0.08	1800	37.30	0.08	25
CDD249225LB	24	14.0 – 26.4	0.10	2300	49.52	0.13	32
CDD249225MB	24	14.0 – 26.4	0.12	2800	60.00	0.19	37
CDD249225HB	24	14.0 – 26.4	0.18	3300	72.80	0.26	43
CDD24922XB	24	14.0 – 26.4	0.25	3800	81.50	0.35	46
CDD249225UB	24	14.0 – 26.4	0.40	4800	102.60	0.53	53