



□ 92x92x25 mm

Frame: Plastic

Impeller: Plastic Material UL94V-0

Ambient Temperature Range: -10°C ~ +70°C


Bearing: Ball,

Motor Structure: DC Brushless Motor


Package: 96 g / PC



Dimension (units:mm)

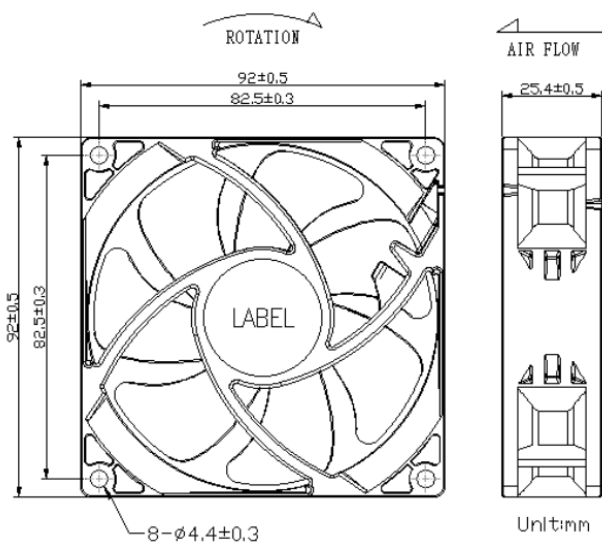

Characteristic Curves

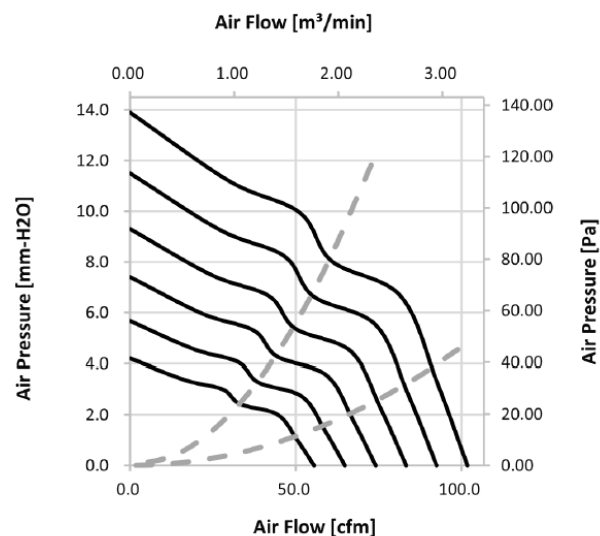

SPECIFICATION

Model	Voltage (V)	Operating Voltage Range(VDC)	Current (A)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H2O)	Noise (dB)
CDF129225JB	12	7.0 – 13.2	0.30	3500	64.80	0.22	43
CDF129225LB	12	7.0 – 13.2	0.35	4000	74.10	0.29	46
CDF129225MB	12	7.0 – 13.2	0.45	4500	83.30	0.37	50
CDF129225HB	12	7.0 – 13.2	0.70	5000	92.50	0.45	53
CDF129225XB	12	7.0 – 13.2	0.85	5500	101.75	0.55	56
CDF249225JB	24	14.0 – 26.4	0.15	3500	64.80	0.22	43
CDF249225LB	24	14.0 – 26.4	0.19	4000	74.10	0.29	46
CDF249225MB	24	14.0 – 26.4	0.23	4500	83.30	0.37	50
CDF249225HB	24	14.0 – 26.4	0.35	5000	92,50	0.45	53
CDF489225XB	24	14.0 – 26.4	0.40	5500	101.75	0.55	56
CDF489225HB	48	28.0 – 56.0	0.20	5000	92,50	0.45	53
CDF489225XB	48	28.0 – 56.0	0.25	5500	101.75	0.55	56