



# □120x120x38 mm (□4.69x4.69x1.5 in)



**Frame:** Die cast aluminum

**Impeller:** Thermoplastic PBT UL94V-0

**Ambient Temperature Range:** -20°C ~ +70°C

**Operating Voltage Range:** Rated Voltage ±10%

**Bearing:** Ball or Sleeve


**Motor Structure:**

**Motor protection:**


**Termination:** Terminals or Lead wire 290~340mm

**Package:** 250g / PC

## Dimension (units:mm)

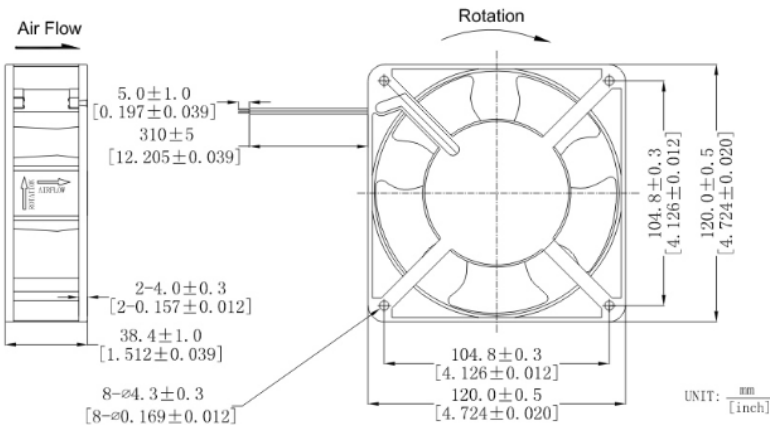

## Characteristic Curves

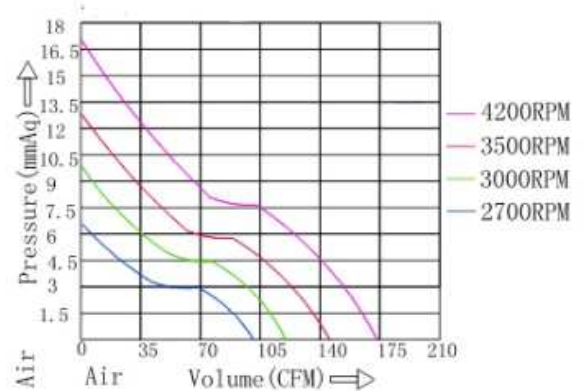

## SPECIFICATION

Model	Voltage (V)	Freq. (Hz)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m3/min)	Pressure (in-H2O)	Noise (dB)
CYE11238HB	80-130	45-65	8.2	3500	142	4.02	0.51	52
CYE11238XB	80-130	45-65	11.7	4200	170	4.81	0.66	55
CYE21238HB	100-240	45-65	8.2	3500	142	4.02	0.51	52
CYE21238XB	100-240	45-65	11.7	4200	170	4.81	0.66	55