



□ 280x280x80 mm

Frame: Aluminum

Impeller: Thermoplastic PBT 94V-0



Ambient Temperature Range: -40°C ~ +80°C

Bearing: Ball

Termination: Terminals or Lead wire


Weight: 2200 g

Dimension (units:mm)

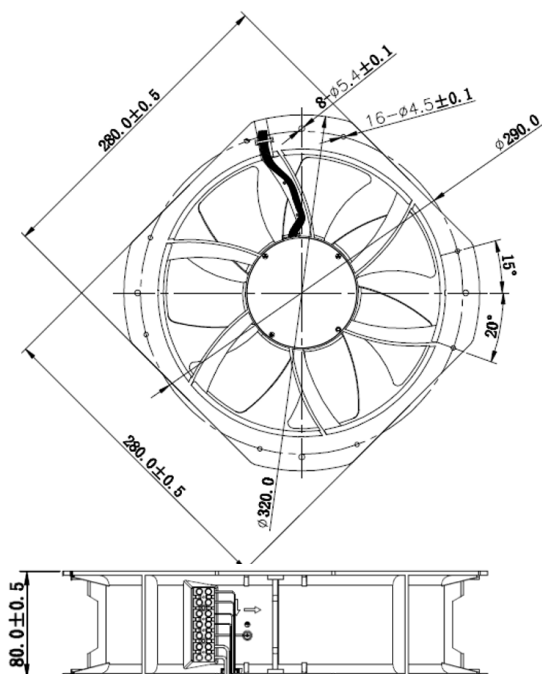

接线方式:
CON10: L 颜色: 棕色
CON11: N 颜色: 蓝色
CON12: PE 颜色: 黄/绿色
3: 正 颜色: 红色
2: PWM 颜色: 蓝色
1: 负 颜色: 黑色
4: FG 颜色: 黄色

Characteristic Curves

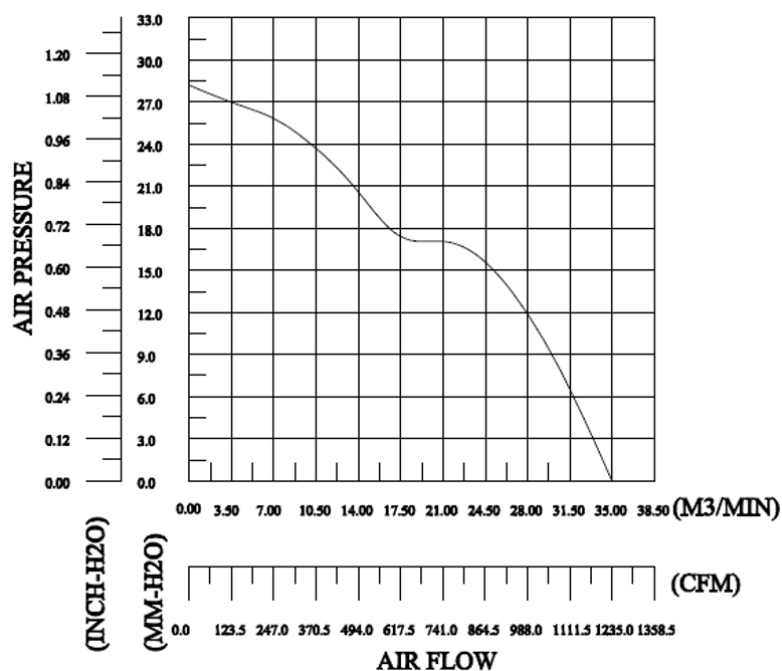

SPECIFICATION

	Voltage (V)	Operating Range (V)	Freq. (Hz)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m3/min)	Pressure (in-H2O)	Noise (dB)
CYE22880HB	220	150-240	50/60	140	3200	1234	34.96	1.11	71

- If you want another RPM or Voltage or Functions which not in the list. Please contact with us. We can customize for you.
- Specifications are subject to change without notice.