




□ **214x75mm**
 (□ **8.42x2.95 in**)

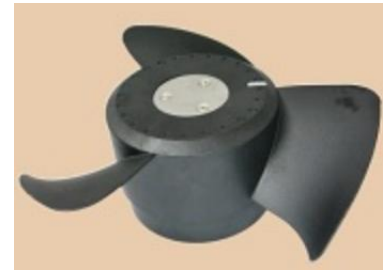

Impeller: Glass fiber reinforced plastic (UL94V-0)

Ambient Temperature Range: -20°C ~ +65°C

Operating Voltage Range: Rated Voltage ±10%

Bearing: Ball bearing


Motor Structure: Capacitor induction

Motor protection: Thermal Protected


Termination: Lead wire

Package: 1740g / PC

Dimension (units:mm)

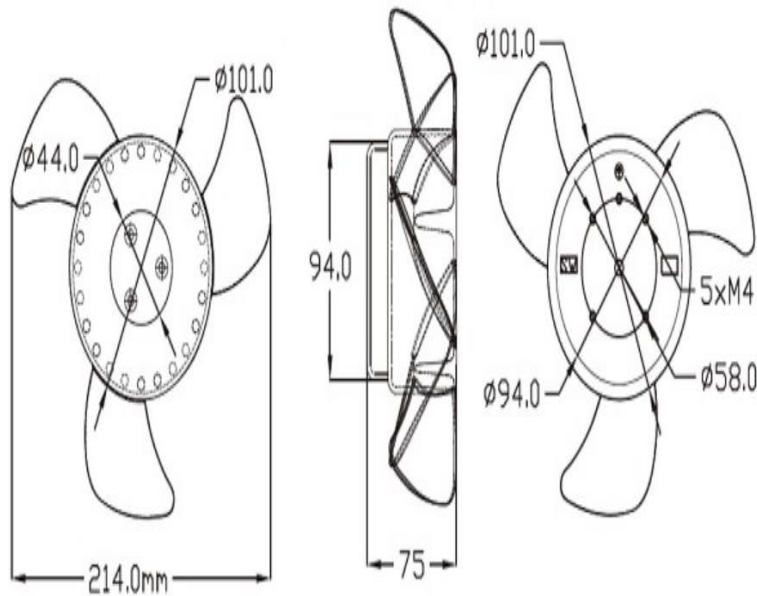

Characteristic Curves

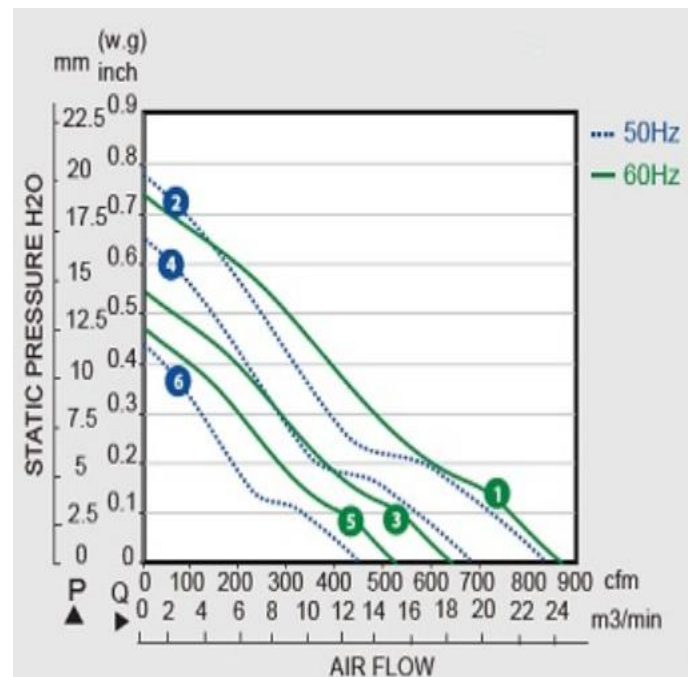

SPECIFICATION

Model	Voltage (V)	Freq. (Hz)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mm Aq)	Noise (dB)
CYS12175HB	115	50/60	60/75	2600/2700	820/860	19.81/18.54	65
CYS22175HB	230	50/60	60/75	2600/2700	820/860	19.81/18.54	65