



□ **85x28.5mm**  
 (□ **3.34x1.12 in**)



**Impeller:** Glass fiber reinforced plastic (UL94V-0)

**Ambient Temperature Range:** -20°C ~ +70°C

**Operating Voltage Range:** Rated Voltage ±10%


**Bearing:** Ball bearing

**Motor Structure:** Shaded pole induction


**Motor protection:** Impedance Protected

**Termination:** Lead wire

### Dimension (units:mm)

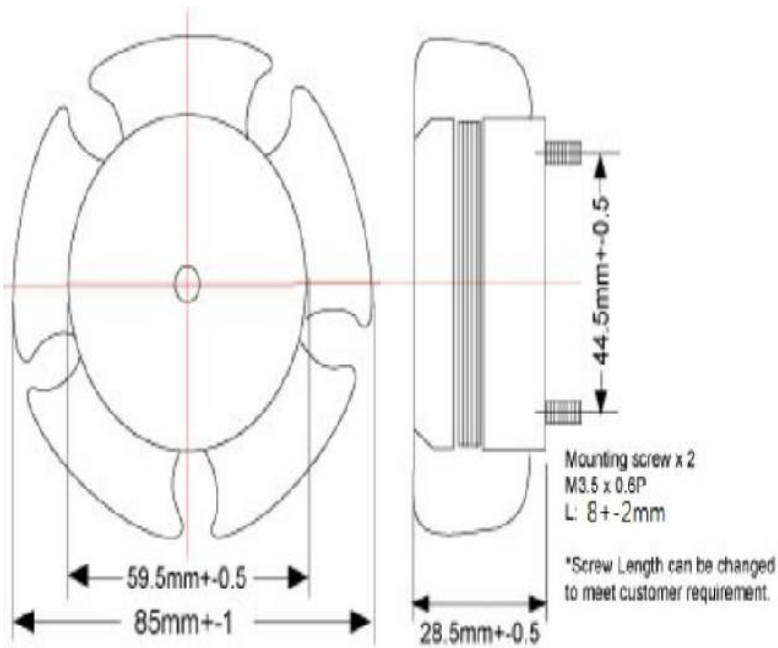

### Characteristic Curves

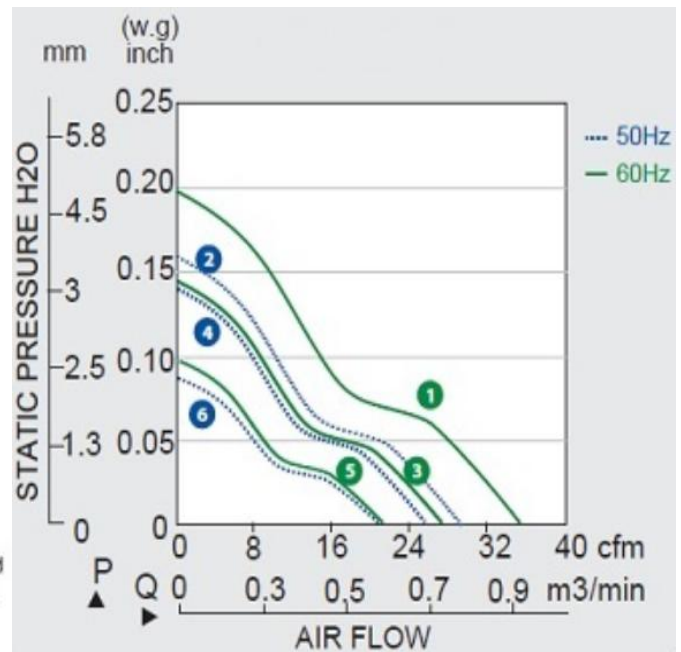

## SPECIFICATION

Model	Voltage (V)	Freq. (Hz)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mm Aq)	Noise (dB)
CYS18528HB	115	50/60	15/13	2500/3000	30/35	4.06/5.08	30
CYS28528HB	230	50/60	15/13	2500/3000	30/35	4.06/5.08	30

AC Skeleton Fan