






□ 120x41 mm

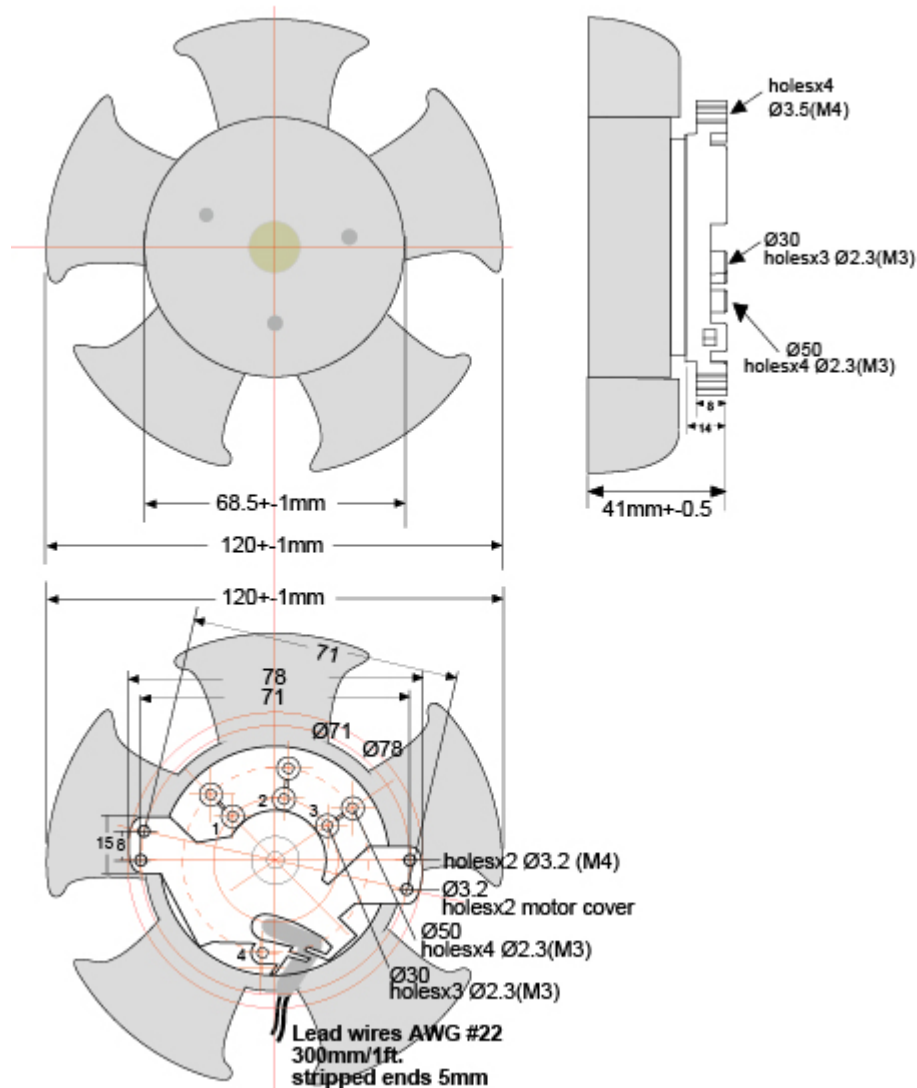

SPECIFICATION

Model	Voltage (V)	Operating Voltage Range(VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H ₂ O)	Noise (dB)
CDS051241LBL	5	4~6	0.4	2	1700	75	0.21	28
CDS051241MBL	5	4~6	0.55	3	2000	90	0.27	32
CDS051241HBL	5	4~6	0.65	3.5	2300	100	0.31	36
CDS051241XBL	5	4~6	1.6	8	2600	113	0.35	40
CDS051241UBL	5	4~6	1.9	9.5	2900	128	0.39	43
CDS121241LBL	12	9~13.8	0.2	2.4	1900	86	0.23	30
CDS121241MBL	12	9~13.8	0.4	4.8	2200	96	0.29	34
CDS121241HBL	12	9~13.8	0.5	6	2500	110	0.33	40
CDS121241XBL	12	9~13.8	0.7	8.4	2800	122	0.37	43
CDS121241UBL	12	9~13.8	0.88	10.6	3100	138	0.4	46
CDS241241LBL	24	26~56	0.15	3.6	1900	86	0.23	30
CDS241241MBL	24	26~56	0.19	4.6	2200	96	0.29	34
CDS241241HBL	24	26~56	0.23	5.5	2600	115	0.35	40
CDS241241XBL	24	26~56	0.35	8.4	2900	128	0.39	43
CDS241241UBL	24	26~56	0.43	10.3	3200	145	0.39	43
CDS481241LBL	48	26~56	0.07	3.4	1900	86	0.23	30
CDS481241MBL	48	26~56	0.08	3.8	2200	96	0.29	34
CDS481241HBL	48	26~56	0.1	5	2600	115	0.35	40
CDS481241XBL	48	26~56	0.16	7.7	2900	128	0.39	43
CDS481241UBL	48	26~56	0.22	10.6	3200	128	0.39	43