



□ 163x66 mm



Impeller: Glass fiber reinforced PBT thermoplastic, UL94V-0 impeller

Ambient Temperature Range: -15°C ~ +65°C


Bearing: Ball

Motor Structure: Programmable microprocessor brushless DC, locked rotor/polarity protected

Termination: Lead wire 300 mm

Package: 870g / PC

Dimension (units:mm)

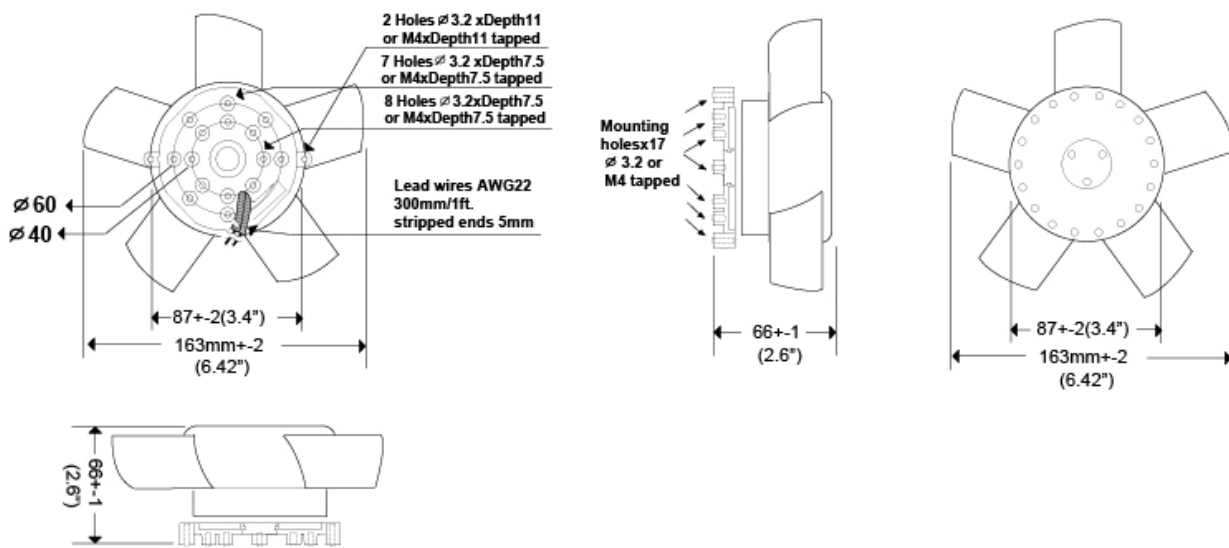

SPECIFICATION

Model	Voltage (V)	Operating Voltage Range(VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H2O)	Noise (dB)
CDS121666LBL	12	10~14	0.45	5.5	1800	240	0.25	38
CDS121666MBL	12	10~14	1.1	13.2	2550	340	0.51	49
CDS121666HBL	12	9~13.8	1.9	23	3100	405	0.74	60
CDS241666LBL	24	15~28	0.2	5	1800	240	0.25	38
CDS241666MBL	24	12~28	0.52	13	2550	340	0.51	49
CDS241666HBL	24	12~27.6	0.97	24	3100	405	0.74	60
CDS481666LBL	48	30~63	0.12	5.8	1800	240	0.25	38
CDS481666MBL	48	28~60	0.3	14.5	2550	340	0.51	49
CDS481666HBL	48	24~55	0.48	23.5	3100	405	0.74	60