



## □ 215x68 mm



**Impeller:** Glass fiber reinforced PBT thermoplastic, UL94V-0 impeller

**Ambient Temperature Range:** -15°C ~ +65°C


**Bearing:** Ball

**Motor Structure:** DC Brushless Motor

**Termination:** Lead wire 300 mm

**Package:** 900g / PC

### Dimension (units:mm)

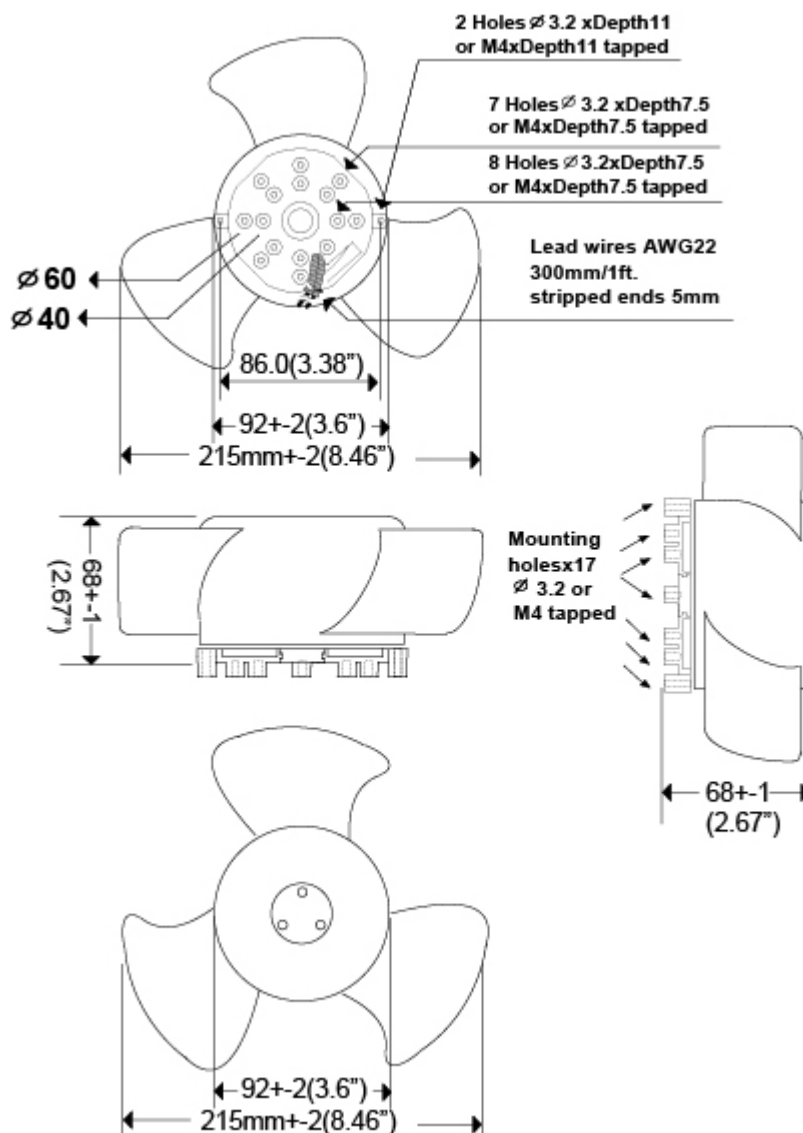



□ 215x68 mm



## SPECIFICATION

Model	Voltage (V)	Operating Voltage Range(VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H <sub>2</sub> O)	Noise (dB)
CDS122168LBL	12	10~16	0.45	5.5	1000	340	0.23	26
CDS122168LBL	12	10~16	0.45	5.5	1650	540	0.36	39
CDS122168MBL	12	9~14	1.1	13.2	2000	680	0.57	46
CDS122168HBL	12	9~13	1.9	23	2400	810	0.78	64
CDS242168LBL	24	18~32	0.2	5	1000	340	0.23	26
CDS242168LBL	24	18~30	0.2	5	1650	550	0.37	39
CDS242168MBL	24	16~27.6	0.52	13	2000	690	0.57	46
CDS242168HBL	24	16~27	0.97	24	2500	830	0.78	64
CDS482168LBL	48	28~63	0.12	5.8	1000	340	0.23	26
CDS482168LBL	48	28~58	0.12	5.8	1650	550	0.37	39
CDS482168MBL	48	24~56	0.3	14.5	2000	690	0.57	46
CDS482168HBL	48	24~53	0.48	23.5	2500	830	0.78	64